

## NONPROVISIONAL PATENT APPLICATION

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320  
Telephone: (703) 836-6400  
Facsimile: (703) 836-2787

Attorney Docket No.: 107014

Date: August 29, 2000

## BOX PATENT APPLICATION

NONPROVISIONAL APPLICATION TRANSMITTAL  
RULE §1.53(b)

Director of the U.S. Patent and Trademark Office  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): DIGITAL CAMERA

By (Inventors): Tadashi OHTA

- ☒ Formal drawings (Figs. 1-19; 18 sheets) are attached.  
☒ A Declaration and Power of Attorney is filed herewith.  
☒ An assignment of the invention to Nikon Corporation & Nikon Technologies Inc. is filed herewith.  
☒ An Information Disclosure Statement is filed herewith.  
☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.  
☐ A Preliminary Amendment is filed herewith.  
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. \_\_\_\_\_, filed \_\_\_\_\_.--  
☒ Priority of foreign applications No. 11-249915 filed September 9, 1999 in Japan and No. 2000-46705 filed February 18, 2000 in Japan are claimed (35 U.S.C. §119).  
☐ A certified copy of the above corresponding foreign application(s) is filed herewith.  
☒ The filing fee is calculated below:

CLAIMS IN THE APPLICATION AFTER ENTRY OF  
ANY PRELIMINARY AMENDMENT NOTED ABOVE

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	48 - 20	= 28
INDEP CLAIMS	9 - 3	= 6
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\* If the difference is less than zero, enter "0".

## SMALL ENTITY

RATE	FEE
	\$ 345
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

OR

OR

OR

OR

OR

OR

OTHER THAN A  
SMALL ENTITY

RATE	FEE
	\$ 690
x 18	\$ 504
x 78	\$ 468
+260	\$
TOTAL	\$ 1,662

- ☒ Check No. 111462 in the amount of \$1,662 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.  
☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,



James A. Oliff  
Registration No. 27,075

Mario A. Costantino  
Registration No. 33,565

JAO:MAC/emb

## DIGITAL CAMERA

BACKGROUND OF THE INVENTION1. Field of the Invention

5           The present invention relates to a digital camera employing a solid-state image sensor, forming picture image of an object, and recording onto a recording medium, in particular, to a digital camera detecting focusing condition, light metering, and  
10 performing white balance process of an object using a single solid-state image sensor, and forming picture image of the object automatically controlling itself based on measured data.

15 2. Description of Related Art

          In order to form picture image of an object, it is necessary to know a distance to the object, light metering of the object, and white balance of the object. Accordingly, other than image sensor for forming picture  
20 image, it has been necessary to have exclusive devices for detecting such as AF (autofocus: detecting focus of the object and automatically driving the picture image forming lens based on the detected data), AE (automatic exposure: light metering of the object and controlling  
25 exposure condition (shutter speed and f-number) based on the measured data), and WB (white balance: measuring the color temperature of the object and processing appropriate color reproduction of the object based on the measured data, or AWB (automatic white balance: when  
30 this process is controlled automatically)), and, moreover, it has been necessary for each process to have exclusive optical systems according to circumstances.

          For example, in AF, it has been necessary to have an exclusive optical system for arranging an AF  
35 sensor in a position equivalent to the film plane, and,

006280-49205960

furthermore, in order to calculate AF with optimum quantity of light, it has been necessary to have another sensor for monitoring incident quantity of light other than image sensor for forming picture image.

5           In AE, as same as AF, in order to enhance accuracy of light metering, it has been necessary to have exclusive optical system and exclusive sensor having a plurality of sensing area.

10           After releasing the shutter, a digital camera, other than ordinary video camera, is necessary to acquire information of the object with optimum quantity of light as fast as possible, in order to avoid losing a shutter chance. Therefore, it has been necessary to have an exclusive WB sensor for measuring color  
15           temperature of the object before forming picture image in order to record a picture with optimum WB condition.

          By the way, it has variously been proposed that all or a portion of AF, AE, and AWB are performed by an image sensor. The Japanese Laid-Open Patent  
20           Application No. 2-210974 discloses an idea that an image sensor performs all of these processes.

          It discloses that a CCD image sensor performs in order from AWB, AF, AE, and, then, forming picture image of an object. An outline of the contents is  
25           described below. At first, in order to perform various calculations accurately within dynamic range of the CCD, an overflow time of the CCD at brightness of the object while forming picture image is measured. In the measurement of color temperature later on, a diffusing  
30           plate is inserted in the optical system, quantity of light in the image plane is equalized, and, then, exposed. Then, output signal from the image sensor is passed through a color-separation circuit and an integrator, A/D converted, and performed AWB calculation in a CPU.

35           In the AF calculation after that, a defocusing

0066280-49205950

lens and a phase difference detection optics are inserted into the optical system, and the CCD is exposed with aforementioned overflow time after being reset. Among the output of CCD, the only output from the AF area is selected by a switch located outside, A/D converted, and performed AF calculation in the CPU. The principle and a way to realize the AF method using phase difference is disclosed, for example, in the Japanese Laid-Open Patent Application No. 9-184973 showing a method using time sequential pupil division.

Fig. 6 shows the principle disclosed in the application. In Fig. 6, reference number 501 denotes a picture image forming lens, 502 denotes a position of an aperture stop of the picture image forming lens 501, 503 denotes a focusing plane, 502a and 502b denote two apertures located the position of the aperture stop, 505a and 505b denote light rays passing through the apertures 502a and 502b respectively, and are coincide with each other in the focusing plane 503. However, the rays are not coincide in the position 503a, and differs in connection with the separation of the apertures and the difference to the focusing plane 503.

Suppose the position of the image plane be 503a, the distance between the apertures be X, the separation of the images focused in the image plane be Y, the distance between the position of the aperture stop and the image plane be L, and the defocusing amount be Z, the following equation is satisfied;

$$X / Y = (L - Z) / Z.$$

The optical system can be focused by controlling the defocusing amount Z.

Fig. 7 is another example according to this principle disclosed in the Japanese Laid-Open Patent Application No. 9-184973. In Fig. 7, reference number 602 denotes aperture stops blocking light flux to the

006280 49205950

optical system, 604 denotes a blade arranged on the shield 602 blocking either one of double apertures, 602a or 602b. By blocking the apertures 602a and 602b by using the blade 604 in turn, time sequential signals of detected focus are output from the image sensor. The defocusing amount is calculated based on the signals, so that the optical system is controlled.

Then, in AE calculation after that, the optics used for aforementioned AF measurement is removed, and the CCD is exposed. Among the output of the CCD, either of output area according to a spot measurement or an average measurement is selected by a switch located outside, the output is integrated, A/D converted, and processed AE calculation in the CPU.

By the way, it has been proposed that the image sensor is fabricated by using CMOS process capable of realizing low cost and low power consumption. Various types of CMOS image sensor having such functions of signal processing or calculation inside the device itself have been proposed. Products applied to low priced digital camera have recently been announced.

CMOS image sensor is characterized by reading out after amplifying minute signal photoelectrically converted by photodiode by means of cell amplifier formed in each pixel. Various types of CMOS image sensor have been proposed such as SIT (Static Induction Transistor), CMD (Charge Modulation Device), BASIS (BAsed Stored Image Sensor), FGA (Float Gate Array), BCMD (Bulk Charge Modulation Device), AMI (Amplified MOS intelligent Imager), and BCAST (Buried Charge Accumulator and Sensing Transistor array).

In addition to this, a vision chip integrating image sensor with calculator having a function of parallel processing for 3D image and an artificial retina chip capable of performing simple retina function

have recently been announced. Regarding the artificial retina chip, application to a field such as game, cellular phone, or security system has been announced.

Principle and function of the artificial retina chip are precisely disclosed in U. S. Patent Nos. 5,694,495 and 5,815,608. Major functions realized by the artificial retina chip are described bellow. At first, it is possible to read out lines between any two lines by sending signals to a plurality of scanners controlling readout of each column of the image sensor (sensor). Multiplication and addition of voltage supplied to the plurality of scanners and intensity of input image are obtained as output of the sensor. As a result, it is easy to obtain image output performed inter-pixel operation (emphasized profile, and the like).

Furthermore, pattern matching is made possible by sequentially supplying scanner-controlling signal as predetermined pattern to the plurality of scanners. Moreover, any range along column direction can be readout by equipping a random scanner for controlling column direction of the sensor. As a result, a picture image of any area can be read out together with the function of aforementioned any-line-readout. On occasion of a plurality of watching patterns, it is possible to read out the plurality of areas by setting a plurality of read out areas, and read out the plurality of areas in turn.

By arranging a circuit for setting a readout time to obtain the partial image after reset the censor cell according to the brightness of the part, the accumulation time can be varied by each cell or by each area. By reading out after transferred more than two lines while reading out, the resolution can be lowered, so that pattern matching can be performed much faster.

006220"49205950

Since above-mentioned various functions can be realized by single sensor, outside circuits for realizing these functions, which have been needed so far, become unnecessary, so that circuit becomes smaller and power  
5 consumption can remarkably be reduced.

Furthermore, since CCD typed image sensor usually outputs signals by transferring electric charge stored in the photoelectric converting portion in response to light exposure, once the signal is read out,  
10 no signal charge is left in the detector cell (so-called "destructive device"). On the other hand, most of the CMOS typed sensors amplify electric charge stored in the photoelectric converting portion by means of the  
15 aforementioned cell amplifier using MOS typed FET or the like and output signals converting into voltage, so that no signal charge is consumed while reading out. There is a merit to be able to read out repeatedly while detecting light (so-called "non-destructive device").

However, when AE, AF, and AWB are processed by  
20 a single image sensor, special optical system for each measurement is needed to be arranged before each measurement. Moreover, in the aforementioned method using time sequential pupil division, since an object must be formed picture image at least twice by changing  
25 the position of the blade, it takes time and time difference occurs between the two picture images, so that focus detection for fast moving object becomes incorrect. Furthermore, the two pupils must be shielded in turn at high speed, so that the mechanism and  
30 controller become complicated, and, as a result, reliability of the mechanism is difficult to be maintained. Therefore, when a photographer releases a shutter for forming picture image of an object, it may take considerably long time to start recording the  
35 object, and, as a result, the right instant for forming

006280-49205950

picture image may be lost.

#### SUMMARY OF THE INVENTION

5 The present invention is made in view of the  
aforementioned problem and has an object to provide a  
digital camera having small time lag for recording the  
object after releasing a shutter by employing less  
movable parts, and by employing an image sensor for other  
purpose as well as actual forming picture image for  
10 recording the object.

According to one aspect of the present  
invention, a digital camera includes an image sensor  
having a plurality of two-dimensionally arranged pixels  
capable of selectively reading out signals from desired  
15 pixels and capable of adding signals of at least two  
pixels prior to getting the output from the image sensor,  
a first processor for processing outputs got from the  
individuals of the pixels of the image sensor to form  
a picture image of an object of the camera and a second  
20 processor for processing the added signal of the image  
sensor for light metering of the object.

In the digital camera according to the present  
invention, by using an image sensor capable of  
selectively reading out signals from desired pixels and  
25 capable of adding signals prior to getting the output  
from the image sensor, signals from respective pixels  
are read out while processing picture image forming, and  
the output is got from the image sensor after signals  
from respective pixels within light-metering area are  
30 added while processing light metering. Accordingly,  
calculation for light metering can be processed quickly  
and a circuit for processing signals output from the  
image sensor can be simple. As a result, power savings  
as well as cost savings can be realized.

35 According to another aspect of the present

006220-4920550



invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels on which electric charge is accumulated to generate signals, respectively, capable of selectively reading  
5 out the signals from desired pixels, and a processor for light metering including a timer for determining a time period from a start of the accumulation of charge to a time when a signal from the image sensor reaches a predetermined level, the light metering being on the  
10 basis of the time period.

Another aspect of the present invention is the digital camera described above, wherein the processor for light metering further comprises an output reader for repeating to get the outputs from the pixels in  
15 accordance with a predetermined timetable, and a comparator for comparing the signal with the predetermined level, and wherein the timer determines a time period from a start of the accumulation of charge to a time when the comparator informs that the added  
20 signal reaches the predetermined level.

While processing light metering, since the light metering is based on the time period from a start of the accumulation of charge to a time when a signal from the image sensor, which outputs signals repeatedly,  
25 reaches a predetermined level, it makes it possible to process light metering with high precision.

Another aspect of the present invention is the digital camera described above, further comprising a focus detector for processing the signal of the image  
30 sensor to detect the focusing condition of the camera.

Another aspect of the present invention is the digital camera described above, wherein the focus detector processes the outputs from the individuals of the pixels of the image sensor to form a digital image  
35 to be investigated in the focus detection.

006280 4926960

Another aspect of the present invention is the digital camera described above, wherein the image sensor is further capable of adding signals of at least two pixels prior to getting the outputs from the image sensor, and wherein the focus detector processing the added signals when the light metering informs an insufficient brightness of an object in terms of the focus detection.

Moreover, since signals for the focus detection is obtained from respective pixels in a predetermined area of the same image sensor, the processing for focus detection can be processed quickly with high precision. When brightness of an object is not sufficient for focus detection, signals from adjacent pixels can be added before outputting, so that the digital camera can be adapted to wide range of brightness.

Another aspect of the present invention is the digital camera described above, further comprising a white balance calculator for processing the signal obtainable from the image sensor without resetting the image sensor after the focus detection.

Another aspect of the present invention is the digital camera described above, wherein the image sensor is further capable of adding signals of at least two pixels prior to getting the output from the image sensor, and wherein the white balance calculator processes the added signal.

Furthermore, since signals can be added before getting the output and the processing for white balance is started without resetting the image sensor after the focus detection, the white balance calculation can be processed quickly without time delay and peripheral circuit for white balance can be simple, so that power savings as well as cost savings can be realized.

Another aspect of the present invention is the digital camera described above, further comprising

006280-49205950

picture image processor for processing the signals from the image sensor to form a picture image of an object of the camera and a white balance calculator for processing the signal obtainable from the image sensor  
5 without resetting the charge accumulated on the image sensor for the picture image.

Further, since forming a picture image of an object is processed after focus detection, a time lag to releasing shutter can be minimized. Moreover, since  
10 the white balance calculation is processed using signals obtained from the image sensor without resetting the charge for the picture image, the white balance calculation is processed quickly with fidelity to the picture image.

Another aspect of the present invention is the digital camera described above, wherein the focus detector includes an optical system for forming an image of an object on the image sensor, a pair of apertures for dividing light flux of the optical system and filters  
15 each arranged across the divided light fluxes passing through the pair of apertures, respectively.  
20

Another aspect of the present invention is the digital camera described above, wherein the image sensor is of a color image sensor having red, green and blue  
25 pixels and wherein the filters arranged across the divided light fluxes are of green and magenta filters, respectively.

Furthermore, since a pair of apertures for dividing light flux of the optical system and arranged  
30 green and magenta filters, respectively are used while processing focus detection, a green image and a magenta image can be separated easily.

According to one aspect of the present invention, a focusing detector includes a color image  
35 sensor having red, green and blue pixels, an optical

006220-49203960

system for forming an image of an object on the color image sensor, a pair of apertures for dividing light flux of the optical system, and green and magenta filters each arranged across the divided light fluxes passing through the pair of apertures, respectively.

Another aspect of the present invention is the focusing detector described above, further comprising an image processor for forming a first image on the basis of the green pixels of the color image sensor and a second image on the basis of the red and blue pixels of the color image sensor, and a calculator for calculating the degree and direction of defocus of the optical system with respect to the object on the basis of the cross correlation between the first and second images.

Further, since the calculation based on the cross correlation between the green image and the magenta image is processed, the degree and direction of defocusing can be easily detected.

According to one aspect of the present invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels and capable of adding signals of at least two-dimensionally arranged three pixels prior to getting the outputs from the image sensor, a processor for processing outputs got from the individuals of the pixels of the image sensor to form a picture image of an object of the camera, and a white balance calculator for processing the added signals of the image sensor.

Another aspect of the present invention is the digital camera described above, wherein the image sensor has a plurality of kinds of color pixels, and wherein the white balance calculator processes the added signals in which the signals of the same kind of pixels are added, respectively.

According to one aspect of the present invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired  
5 pixels, a processor for processing outputs got from the pixels of the image sensor to form a picture image of an object of the camera, and a white balance calculator which functions after the process of the processor.

Furthermore, in the present invention, signals  
10 for forming picture image are read out individually, and the white balance calculation is processed using the same signals for forming picture image based on the added signals in which the signals of the same kind of pixels are added, respectively, so that the white balance  
15 calculation can be processed right after picture image forming with high fidelity.

According to one aspect of the present invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels  
20 capable of selectively reading out signals from desired pixels for the purpose of at least two of the processes for light metering, focus detection, white balance calculation and picture image forming, and an output reader for getting the outputs from the pixels for the  
25 purpose of at least two processes with the signals of the pixels kept without being reset between the first and second processes.

Moreover, since at least two of the processes for light metering, focus detection, white balance  
30 calculation and picture image forming are processed sequentially without resetting the image sensor, the processes are processed quickly with minimized time lag.

According to one aspect of the present invention, a digital camera includes an image sensor  
35 having a plurality of two-dimensionally arranged pixels

capable of selectively reading out signals from desired pixels for the purpose of at least two of the processes for light metering, focus detection, white balance calculation and picture image forming, the image sensor  
5 having a plurality of amplifiers of variable gain for amplifying the signals of the pixels, respectively, and a gain controller for changing the gain between at least the two processes.

According to one aspect of the present  
10 invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels for the purpose of at least two of the processes for light metering, focus detection, white balance  
15 calculation and picture image forming, an amplifier of variable gain for amplifying the output of the image sensor, and a gain controller for changing the gain between at least the two processes.

Further, in at least two of the processes for  
20 light metering, focus detection, white balance calculation and picture image forming, the image sensor can amplify the respective signals when reading out signals from the pixels or getting the outputs from the image sensor, so that the optimum processing can be  
25 processed in accordance with the brightness of the object.

According to one aspect of the present invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels  
30 capable of selectively reading out signals from desired pixels for the purpose of at least two of the processes for light metering, focus detection, white balance calculation and picture image forming, and wherein one process is started in response to completion of  
35 outputting the signals for another process.

006280-49205950

Furthermore, in the sequential processes among light metering, focus detection, white balance calculation and picture image forming, one process starts immediately after completion of another process without waiting synchronization signal for proceeding to the next process, so that the processes are quickly proceeded and the time lag to picture image forming can be minimized.

10                    BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing an embodiment of a digital camera according to the present invention.

Fig. 2a is a diagram showing an arrangement of a filter attached to an image sensor used for a digital camera according to the present invention.

Fig. 2b is a diagram showing another arrangement of a filter attached to an image sensor used for a digital camera according to the present invention.

Fig. 3 is a diagram showing an aperture stop used for a digital camera according to the present invention.

Figs. 4 and 5 are flowcharts showing AF movement of an embodiment as a digital camera according to the present invention.

Fig. 6 is a diagram explaining a principle of phase difference detection.

Fig. 7 is a diagram showing arrangement of apertures and a shield used for time sequential pupil division according to prior art.

Fig. 8 is a block diagram showing a second embodiment of a digital camera according to the present invention.

Figs. 9, 10, and 11 are flowcharts showing procedures for forming picture image according to a digital camera shown in Fig. 8.

Fig. 12 is a diagram showing a display in a viewfinder of a digital camera shown in Fig. 8.

Fig. 13 is a detailed diagram showing an area for light metering within a display in a viewfinder of  
5 a digital camera shown in Fig. 8.

Fig. 14 is a detailed diagram showing areas for light metering and focus detection within a display in a viewfinder of a digital camera shown in Fig. 8.

Fig. 15 is a graph showing a timing for getting  
10 outputs from an image sensor while light metering.

Fig. 16 is a flowchart showing procedure for light metering according to a digital camera shown in Fig. 8.

Fig. 17 is a flowchart showing procedure for  
15 focus detection according to a digital camera shown in Fig. 8.

Fig. 18 is a detailed flowchart showing procedure for focus detection according to a digital camera shown in Fig. 8.

Fig. 19 is a diagram showing another  
20 arrangement of aperture stops used for a digital camera shown in Fig. 1.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 An embodiment of the present invention will be described bellow. Fig. 1 is a block diagram showing an embodiment of a digital camera according to the present invention.

In Fig. 1, reference number 101 denotes a  
30 picture image forming lens for forming picture image of an object, 102 denotes an aperture stop for limiting light flux incident on an image sensor, 103 denotes a CCD image sensor having, for example, a filter with checker pattern as shown in Fig. 2a, where light flux  
35 from the object through the aperture stop 102 forms an

006280"49205950



image, and is changed into electric signal. An example of the aperture stop is shown in Fig. 3.

In Fig. 3, a plurality of apertures (301a through 301d) having different size in accordance with incident light amount capable of being selected and a pair of apertures arranged horizontally and another pair vertically to the optical axis (302a, 302b, 303a, and 303b) for dividing incident light flux (divided-pupil) in order to perform AF are arranged on the surface of the aperture stop 102 for limiting light flux. On each aperture (302a, 302b, 303a or 303b) for divided-pupil AF, a filter having the same color as that for the image sensor 103 or a filter having the complementary color to that for the image sensor 103 is arranged. In a case for an image sensor having a filter shown in Fig. 2 (a), it is desirable that G (green) filters are arranged on the apertures 302a and 303a, and M (magenta) filters, which is the complimentary color of G, are arranged on the apertures 302b and 303b.

Then, in a signal processing circuit 104, the electrical signal translated from object signal by the image sensor 103 is treated CDS (correlated-double-sampling) processing and gamma processing, transformed into digital signal, performed gain adjustment, interpolation, compression, and the like, which are publicly known processing, and stored in removable recording medium 105 such as a memory card.

Various processing circuits other than publicly known processing according to the present invention, which perform various processing described bellow, are included in the signal processing circuit 104. A first circuit is for discriminating whether output level of the image sensor 103 is appropriate or not while measuring light amount by using apertures for divided-pupil. Specifically, this is a circuit for

changing charge-accumulation time of a CCD device, a circuit for setting transmittance of an LCD when the LCD is arranged as apertures for divided-pupil, or a circuit for detecting whether the brightness of AF area reaches proper level after image has been input by a plurality of times when an object is too dark. A second circuit is for discriminating whether the contrast is sufficient or not while performing divided-pupil AF. A third circuit is for separating light flux passed through two apertures into two image signals by using sampling. A fourth circuit is for calculating defocusing amount by calculating cross correlation of the separated two image signals. It is possible to construct these circuits in one ASIC, and, as a result, camera can be made compact.

Further, signals before forming picture image can be confirmed its exposure, focusing, imaging angle, and the like by a display 106. It is certainly possible that image signals stored in the recording medium 105 are reproduced, translated to a signal form suitable for display by the signal processing circuit 104, and shown on the display 106.

A control circuit 107 is for controlling sequence throughout the camera, and is activated to start a series of processes including forming picture image and recording in response to input from a operating member 108 composed of a shutter button, not shown, an AF area selection button, and the like, which is operated by a user. Moreover, the control circuit 107 outputs a signal for rotating the aperture stop 102 to a driver 109 based on results of various processing done by the signal processing circuit 104.

On the occasion of rotating the aperture stop, one of aperture stops (301a through 301d) is selected when forming picture image, and either pair of apertures for divided-pupil AF (302a, b, or 303a, b) is selected

when processing AF. Furthermore, the control circuit 107 outputs a signal to a driver 110 for moving the lens to a focusing position. Furthermore, the control circuit 107 includes a changing means for changing lens-driving mode from AF to a manual mode when the control circuit 107 discriminates that it is impossible to process AF because of lack of contrast based on calculated result from aforementioned signal processing circuit 104.

10 AF process of the digital camera according to the present invention will be described with reference to the flow chart shown in Figs. 4 and 5.

In step S401, two colors of light flux having G-image and M-image in the state of mixed color passing through either one pair of apertures for divided-pupil AF 302a (G-filter) and 302b (M-filter) or 303a (G-filter) and 303b (M-filter) form images on the CCD 103, simultaneously.

In step S402, whether a brightness of the image is included in predetermined scope or not is discriminated. When it is included in the scope, step proceeds to step S405. On the other hand, when it is not included in the scope, step proceeds to S403.

In step S403, a charge-accumulation time of a CCD device is changed, an exposure is made again, and this step is repeated until the brightness level has become appropriate. If the brightness has not become appropriate in step S402 after repeated this several times and the charge-accumulation time of a CCD device has exceeded the scope capable to be changed, the object must be too bright or too dark. In this case, step proceeds to S405 via S404.

In step S405, the image is divided into G-image and M-image by aforementioned sampling.

35 In step S406, whether the contrast in the AF

006280-49205960

area of each divided image is sufficient or not is discriminated. When the contrast is sufficient, in step S407, publicly known cross correlation is calculated between G-image and M-image within AF area after  
 5 corrected pixel shift of two images. When the contrast is not sufficient in step S406, the aperture stop 102 is rotated to change arrangement of the pupil in steps 408 and 409, and, in step S410, the image after changed arrangement of the pupil is read out. Then, step goes  
 10 back to S405. The image is divided into G-image and M-image, and calculated cross correlation.

On the other hand, when it is discriminated in step S406 that the contrast is not sufficient even if the arrangement of the pupil is changed in step S409,  
 15 step proceed to S411 via S408, and displays "unable to focus".

On the contrary, when it is discriminated in step S406 that the contrast is sufficient, cross correlation is calculated in step S407, and whether in  
 20 focus or not is discriminated in step S412. In step 412, when it is discriminated that the shift between two images is sufficiently small, and the image is in focus, step proceeds to S413 shown in Fig. 5.

In step S413, an aperture stop for an actual  
 25 exposure for recording is selected.

In step S414, an actual exposure for recording is performed.

In step S415, the recorded image is read out.

When it is discriminated in step S412 that the  
 30 image is out of focus because of large defocus amount, it is confirmed in step S416 that the lens is within scope of movable range, displace amount of the lens is calculated based on the defocus amount of the image, and the lens is moved to predetermined direction by  
 35 predetermined amount in step S417. By the way, the

direction to move the lens is determined by discriminating shift direction of an image relative to the other one.

After moved the lens by predetermined amount  
5 in step S417, the image is read out in step S410, and  
aforementioned procedures are repeated until it is  
discriminated to be in focus. When the lens comes to  
nearest limit or infinity limit in step S416 without  
discriminating to be in focus in step S412, "unable to  
10 focus" is displayed in step S411, and AF area is changed  
in step S418. This change can be performed  
automatically, or arranged to set manually.

When AF area is changed in step S418, step goes  
back to above-described S406, contrast is confirmed, and  
15 above-described predetermined procedure is followed.  
When AF area is not changed, or when AF area is changed  
predetermined times without reaching "in focus", step  
proceeds to S419 and the lens-driving mode is changed  
to a manual mode. Then, after manually adjusted  
20 focusing, step proceeds to S413 shown in Fig. 5, an image  
of the object is exposed for recording, and the flow is  
terminated.

By the way, in the explanation up to now,  
although the filter arrangement of a CCD is assumed to  
25 be one shown in Fig. 2a that is an R-G-B checked  
fundamental color filter, an arrangement of G stripe and  
R-B in turn linearly as shown in Fig. 2b can be applicable.  
In the latter case, however, pixel shift can be corrected  
by horizontally shifting either G-image or M-image by  
30 one pixel. Moreover, the filter arrangement of an image  
sensor is not limited to these types. The present  
invention can be applied to other filter arrangements  
by changing filter for divided-pupil in accordance with  
the arrangement. In this embodiment, although a color  
35 filter is arranged on an aperture of the shield, the

006280"49205950

position for arranging the filter is not limited to this position so long as it is vicinity to the aperture and across the light flux.

Then, a second embodiment of the present invention will be explained. Fig. 8 is a block diagram showing a digital camera according to the present invention. In Fig. 8, a block having the same function as shown in Fig. 1 is denoted by only its name.

In Fig. 8, reference number 801 denotes a picture image forming lens, 802 denotes an aperture stop having a plurality of apertures shown in Fig. 3, 803 denotes a CMOS image sensor having, for example, a filter arrangement shown in Fig. 2 (a), which uses an artificial retina chip capable of outputting signal from arbitrary pixel randomly, and, also, outputting added or averaged signals of a plurality of pixels within the image sensor. An image signal transformed into electrical signal by the image sensor 803 is processed by a signal processing circuit 804, which is same well-known processing as described in 104 in Fig. 1, and stored in a recording medium 805. Other than aforementioned various processing, the signal processing circuit 804 includes a circuit for calculating a shutter speed and a f-number from a signal based on an exposure for light metering, and a circuit for calculating white balance to a recorded image from a signal based on an exposure for processing white balance process. A display 806 makes it possible to confirm recorded and reproduced pictures.

A control circuit 807, as same as 107 in Fig. 1, is activated to start a series of processes including forming picture image and recording in response to input from a operating member 808. Other than various buttons explained in Fig. 1, the operating member 808 includes an AE mode-selection button for selecting a spot metering, a center-weighted metering, or the like, an

AE/AF area-selection button, an AE/AF area-exchange button for exchanging the function of the AE/AF area-selection button, a release selection button for selecting whether or not release shutter on occasion of  
 5 "out of focus" in AF mode, an initial-time-setting button for setting initial time interval for reading out detected signal for light metering, and the like.

Moreover, the control circuit 807 gives an order to a driver 809 for rotating the aperture stop 802  
 10 and selecting either aperture (602 through 605) based on AE calculation while forming picture image, and either aperture for divided-pupil AF (606 or 607) while performing AE or AF. Furthermore, the control circuit 807 gives an order to a driver 810 for driving the picture  
 15 image forming lens 801 to a focusing point based on AF calculation while performing AF.

Fig. 9 is a flow chart explaining the procedure for forming picture image by a digital camera according to the present invention.

20 In step S101 in Fig. 9, after power source is on, various initial setting to the camera is processed by the aforementioned various operating member (808 in Fig. 8) in order to process light metering and focus detection as a first stage of forming picture image. As  
 25 for the light metering, there are mode selection of light metering such as a center-weighted metering, a spot metering, and the like, and area selection of light metering where the light metering is processed. As for the focus detection, a position where the focus  
 30 detection is performed is selected. In this position for light metering and focus detection, when a photographer does not select any area for light metering or focus detection, central position where the important subject may exist is initially selected.

35 Then, light metering is started processing in

step S102. Exposure signal from selected area for light metering of the image sensor is read out. When the signal level reaches to a predetermined signal level, calculation of a shutter speed and f-number for forming picture image is immediately started.

At a same time, in next step S103, focus detection of an object is started by using signal from an area usually same as the area for light metering selected in step S101. When an area for focus detection different from the area for light metering selected in step S101 is selected, it is needless to say that focus detection is performed based on the signal from selected area for focus detection. The detail of the focus detection will be described later.

As a result of step S103 when the object is in focus, the object is immediately exposed for recording in step S104. However, shutter can be released only when the aforementioned steps for light metering and focus detection are completed. When signals from the image sensor are output in step S104, white balance process is immediately started in step S105. As a result of processing white balance process, white balance of the object is obtained by well-known processing such as nullifying color-difference signal, and after processes such as gamma adjustment, data compression, and the like have been completed the data is recorded on the recording medium 805. By the way, while half-depressing the shutter button, step S102 for light metering and step S103 for focus detection are repeated.

In the embodiment described above, processes of light metering and focus detection are processed successively. In other words, when output signal resulted from a process is obtained, a calculation based on the output signal is performed and, at the same time, another process is started. Moreover, white balance

006280"49203950



process is performed after completed exposure for recording, so that time lag to forming picture image can be minimized.

As for the image sensor, when an aforementioned non-destructive type device is used, the procedure for forming picture image shown in flow charts in Figs. 10 and 11 becomes possible. In Fig. 10, step S105 comes before steps S103 and S104. In other words, when optimum output is obtained from the image sensor as a result of process for light metering, calculation for light metering is started, at the same time, signal for performing white balance process is output from the image sensor with approximately same exposure state, calculation for white balance is started, and, at the same time, signal for focus detection is output from the selected area for focus detection, and calculation for focus detection is started, so that the time lag to the next forming picture image can be extremely shortened.

In the case of Fig. 11, steps S101 through S103 are same as Fig. 9. However, steps S104 and S105 are reversed. In other words, the signal accumulated on processing focus detection is used for calculating white balance after light metering and focus detection have been completed, so that the time lag to the next forming picture image can also be extremely shortened.

In above-described processes for performing white balance process and calculating white balance, it is needless to say that white balance can be set manually. In this case, the step for processing white balance process can be left out from the aforementioned procedure, so that the time lag to the next forming picture image becomes same as Fig. 9.

Light metering and focus detection among these picture image forming procedure is described specifically in Fig. 12 and figures following this. Fig.



among five areas 902 and a center-weighted area in Fig. 12 is read out with previously set time interval in order from shorter interval. In other words, averaged light level in the selected area can be read out continuously  
5 along passing time.

On the other hand, in case the image sensor is destructive type, the structure of an area for light metering and the way of reading out is different from those using non-destructive type image sensor, so that  
10 this case is described below. Fig. 13 is a drawing enlarged one of five areas 902 in Fig. 12 when a destructive type is used for the image sensor. For the purpose of simplicity, the area is divided five both vertically and horizontally and made it total  
15 twenty-five sub-areas. Attached number in each sub-area is corresponding to four kinds of reading out time intervals ( $t_1$ ,  $t_2$ ,  $t_3$  and  $t_4$ ), respectively, in Fig. 15. Each divided sub-area may be constructed by a block of pixels, for example,  $2 \times 2$  or more. Charges accumulated  
20 in the pixels within a same block or blocks set to be same time interval are added, and output.

By constructing like this, average signal level stored in a plurality of pixels in the area is obtained in order from shorter reading out time interval, so that  
25 state of signal accumulation can be observed in real time even in destructive type image sensor. Above-described block may be constructed by one pixel.

In step S204, signal read out by different way in accordance with destructive/non-destructive type of  
30 the image sensor is discriminated whether the signal level is within a range of predetermined level. The lower limit is an output level capable of obtaining an SN not producing error while calculating light metering. On the other hand, the upper limit is an output level  
35 of the image sensor just before saturating. When the

output signal level is discriminated to be within the range of the predetermined level, the flow proceeds to step S205.

In step S205, a shutter time and f-number for actual picture image forming is calculated. Specifically, when an output signal level read out a certain time among signals read out in order from shorter time interval such as  $t_1, t_2, t_3, \dots$  is within the range of the predetermined level, the calculation for determining a shutter speed and f-number is started without delay, and, at the same time, flow proceeds to a step for focus detection or performing white balance process. When the calculation for determining a shutter speed and f-number used for actual picture image forming has been completed in step S205, flow proceeds to step S209.

In step S209, a shutter speed and f-number are stored in the control circuit 807 in Fig. 8, and the flow regarding light metering is completed.

On the other hand, it is described below that the signal level read out from the image sensor in step S204 is discriminated to be out of the range of the predetermined level. The flow proceeds to step S206.

In step S206, whether the aperture stop and the first reading out time are the same values as those set originally or not is discriminated. When the values are remained same, the flow proceeds to step S207.

In step S207, aperture stop and reading out interval are changed in order to change exposure condition according to the brightness of the object. As initial setting, there are ten ways of reading out time interval  $t_1, t_2, t_3, \dots, t_{10}$ , and each reading out time is set to be exponent of two such as  $1''/2048, 1''/1024, 1''/512, \dots, 1''/4$ . When output level of read out signal at read out time  $t_1$  is already reached to saturating level

of the image sensor because of too bright object, the aperture stop is set to be minimum aperture shown in Fig. 3, the shutter speed is set to be a speed as fast as possible, or these conditions are combined together.

- 5 Accordingly, an object having higher brightness can be measured its brightness. A newly set fastest reading out time interval is also set to be exponent of two as same as above.

- On the other hand, when output level of read  
10 out signal at originally set read out time  $t_{10}$  is not reaches to appropriate level because of too dark object, the aperture stop is set to be maximum aperture, or the shutter speed can be set to be long within a range not to produce degradation of imaging quality of the image  
15 sensor. In this case also, the reading out time interval is set to be exponent of two.

- In above-described cases, the reading out time interval is changed after one measurement for light metering has been processed. When it is known in advance  
20 that background brightness condition is too dark or too bright, initial setting in step S201 can be changed in advance. Specifically, when a night view picture image, which is dark, is going to be formed, a first reading out time interval should be changed to  $1"/512$ . On the  
25 other hand, when a picture image of outdoor ski scene, which is very bright, is going to be formed, a first reading out time interval should be changed to  $1"/4096$ . Therefore, the time to light metering can be shortened. These setting can be performed by using the operating  
30 member 808 in Fig. 8.

After re-setting has finished in step S207, flow goes back to step S202.

- In step S206, when the aperture stop or the shutter speed has already been changed, flow proceeds  
35 to step S208, and a warning sign for over exposure or

under exposure is displayed on the camera. Immediately after that flow proceeds to steps for focus detection or performing white balance process. At the same time, the maximum or minimum value of the aperture and shutter speed to which the camera can be set are stored in the control circuit 807 in Fig. 8 in step S209, and the flow for AE is completed.

Fig. 14 is another example of an area for light metering using destructive type image sensor. In this case, one of five selection areas 902 in Fig. 12 is further divided into three areas. The upper and lower part are used for detecting signals for light metering, and the central part is used for detecting signals for focus detection. With constructing like this, when average signal output from upper and lower blocks for light metering reaches to appropriate signal level, the calculation of light metering is immediately started, and, at the same time, the calculation for focus detection can be started based on the signal read out from each pixel in the central area for focus detection, so that the image sensor need not to be reset in order to make exposure for focus detection after making exposure for light metering, and, therefore, there is no waste of time.

Then, a flow chart for focus detection will be roughly explained with reference to Fig. 17.

In step S301, an exposure for focus detection is processed in this step. However, when a non-destructive type is used for the image sensor, electric charge accumulated by the aforementioned exposure for light metering can still be used, so that this step is unnecessary. On the other hand, when the selected area structure shown in Fig. 14 is used even if destructive type image sensor is employed, the image sensor need not to be reset for new exposure, and signals for focus

006220"49Z05950  
detection can be obtained immediately after light metering. In step S302, on reading out each signal from the selected AF area, when the brightness of an object is low as a result of preceded steps for light metering, 5 signal level is made larger by electrically enlarging gain, and, as a result, contrast is enhanced. Then, flow proceeds to step S303.

When the brightness of the object is low, other than this way of enlarging gain, output signal level can 10 be enlarged by adding signals of adjacent two pixels and outputting them. On processing this addition, other than a way that the first and second pixels are simply added and output, and, then, the third and fourth pixels are added and output, there is a way that the first and 15 second pixels are added and output, and, then, the second and third pixels are added and output, and following addition is processed increasing by one pixel at a time. The latter way makes it possible to prevent degradation of resolving power. Of course it is possible to add more 20 than two pixels at a time. By the way, adjacent pixels used here denote adjacent pixels forming image of same color.

Although step S303 is usually unnecessary when signal for AF is read out immediate after light metering, 25 it is necessary when the brightness of the object changes while moving lens because of out of focus explained later. When the output signal level from the AF area is discriminated to be out of the predetermined range, flow proceeds to step S304 for light metering again.

30 When the output signal level from the AF area is discriminated to be within the predetermined range, flow proceeds to step S305.

In step S305, well known cross correlation calculation is performed and flow proceeds to step S306.

35 In step S306, whether the object is in focus

or not is discriminated based on the result of step S305. When the object is discriminated to be in focus, the flow for focus detection is completed, and proceeds to steps for forming picture image or for performing white  
 5 balance process. When the object is discriminated not to be in focus, a moving amount for the lens is calculated based on the shift amount calculated in step S305, and flow proceeds to step S307.

In step S307, whether the moving amount reaches  
 10 beyond movable range (infinity limit or close object limit) of the picture image forming lens or not is discriminated. When the moving amount is discriminated not to reach beyond movable rang, flow proceeds to step S308.

15 In step S308, the lens is moved by the moving amount and flow proceeds to step S309.

In step S309, the image sensor is reset, and flow goes back to step S301.

On the other hand, when the moving amount is  
 20 discriminated to reach beyond movable rang, or when the object is discriminated not to be in focus certain times, flow proceeds to step S310.

In step S310, unable to focus is displayed, and the AF flow is completed.

25 In explanation above, although flow proceeds to next step for forming picture image in spite of out of focus, it may be set that forming picture image is not allowed without in focus. This is a matter of photographer's taste.

30 Regarding the procedure for focus detection described in Fig. 17, a procedure for AF is described in detail with reference to Fig. 18. Step S501 can be used both as exposure for light metering and that for AF as described before. Two colored light flux passing  
 35 through apertures for divided pupil 302a (Green filter)



and 302b (Magenta filter), or 303a (Green filter) and 303b (Magenta filter) are focused on the image sensor 803 with a state of mixed colors of Green-image and Magenta-image at the same time.

5           In step S502, signals for Green-image and Magenta-image formed in AF area are read out separately by sampling.

          In step S503, when the output signal level is not within a predetermined range, flow proceeds to step 10 S504, and performs exposure again.

          On the other hand, when the output signal level is within the predetermined range, flow proceeds to step S505.

          In step S505, whether contrasts of the images 15 in AF areas of the separated images are sufficient or not is discriminated. When the contrasts are sufficient, flow proceeds to step S506.

          In step S506, correction of pixel-shift produced in AF area of Green image relative to that of 20 Magenta image (in this case, whole pixels of either one image is shifted by one pixel to horizontal direction) is performed, and well-known cross correlation calculation is performed. In order to process AF calculation quickly, shift amount of one pixel can be 25 corrected after cross correlation calculation. Moreover, the correction of pixel-shift is not necessary when the cross correlation calculation is performed to the Green and Magenta images whose lacked pixels are interposed for correction.

30           On the other hand, in step S505, when the contrasts are not sufficient in such a manner that the direction in which contrast in AF area of an object exists is not the same direction of a pair of apertures, flow proceeds to step S507.

35           In step S507, whether the aperture has not been

changed or not is discriminated. When the aperture has not been changed, flow proceeds to step S508.

In step S508, the aperture stop 802 is rotated in order to change pupil position, so that a pair of  
 5 apertures 302a and 302b in Fig. 3 are changed to 303a and 303b, and flow proceeds to step S509.

In step S509, the image sensor is reset, and flow goes back to step S501.

On the other hand, in step S505, if it is  
 10 discriminated that the contrast of the image is not sufficient even if the position of pupil has been changed, flow proceeds to step S513 via step S507.

In step S513, "unable to focus" is displayed and the AF flow is completed.

On the other hand, when it is discriminated that  
 15 the contrast is sufficient, flow proceeds to step S506.

In step S506, cross correlation calculation is performed as same as a case in Fig. 17, and flow proceeds to step S510.

In step S510, whether the image is in focus or not is discriminated. When it is discriminated to be in focus because of a small defocus amount between two images, and the flow for focus detection is completed.

On the other hand, in step S510, when it is  
 25 discriminated to be out of focus, flow proceeds to step S511.

In step S511, whether the moving amount is beyond movable rang (infinity limit or close object limit) of the picture image forming lens or not is  
 30 discriminated. When the moving amount is discriminated not to reach beyond movable rang, flow proceeds to step S512.

In step S512, the lens is moved predetermined direction. By the way, the direction of movement can  
 35 be determined by discriminating shift direction of an

image relative to that of the other image. Flow proceeds to step S509 for resetting image sensor and returns to step S501. In order to reduce time to form picture image for recording, it is possible to construct flow such that  
5 picture image can be formed for recording after repeating re-exposure and focus detection only once.

On the other hand, in step S511, when the lens has already reached the infinity limit or near object limit, flow proceeds to step S513.

10 In step S513, "unable to focus" is displayed and the AF flow is completed. However, a step for changing AF area can be inserted according to circumstances. This change can be made automatically or can be set manually. Further, it may be constructed  
15 that the way of moving the lens is changed to manual when unable to focus. It is best to be constructed that these change in AF area and manual control of the lens are selected according to user's taste.

After the steps for focus detection have been  
20 completed as described above, the image sensor is immediately reset, and forming picture image for actual recording is performed using the shutter speed and f-number obtained as a result of aforementioned light metering. On the occasion of forming picture image,  
25 although imaging signal read out from the image sensor is usually for whole frame, it is possible to read out thin down signal when the number of recordings to a recording medium should be increased or when cycle time for recording should be shortened.

30 The read out signal is transformed to digital signal and recorded in a buffer memory for one frame in a hurry, and, then, processed such as gamma processing, white balance processing, compression, and the like, and, after that, recorded in the recording medium 805 as a  
35 digital still image. In this case, immediately after

the imaging signal has been recorded in the buffer memory, accumulated signals from pixels of the same color filter are added and read out again from the image sensor, and the aforementioned white balance processing is performed based on the magnitude of each color signal to reduce color difference.

Although various processing and movement have usually been performed based on a vertical drive signal as a standard, in the present invention, immediately after one process has been completed another process is started as described above, so that no time is wasted. Moreover, since the signal is read out after performing as much processing possible to be done by the image sensor, processing to be done by hardware and software other than image sensor is greatly reduced, and, as a result, the shutter time lag can be reduced remarkably.

Fig. 19 is a drawing showing another example of an aperture stop used for a digital camera according to the present invention. In Fig. 19, a circle A shown in a broken line is the maximum aperture used while forming picture image, arranged on a shield 102 having a plurality of apertures having different diameter with each other. A shield 701 having a pair of apertures 602a, 602b for focus detection is arranged in the vicinity of the circle A. The shield 701 can be moved and rotated in the direction denoted by arrows in Fig. 19. The pair of apertures 602a, 602b are always moved within the maximum aperture A, so that focus detection can be processed at almost all area in the picture field.

In the present invention, although it is described that light metering, focus detection and performing white balance process are performed by an image sensor, it is not necessary to use only one device for all process. It may possible to suitably combine each designated devices in order to provide a camera

having the most effective shape.

006220" 4920550

WHAT IS CLAIMED IS:

## 1. A digital camera comprising:

an image sensor having a plurality of two-  
dimensionally arranged pixels capable of  
selectively reading out signals from desired pixels  
and capable of adding signals of at least two pixels  
prior to getting the output from the image sensor;  
a first processor for processing outputs got from  
the individuals of the pixels of the image sensor  
to form a picture image of an object of the camera;  
and  
a second processor for processing the added signal  
of the image sensor for light metering of the  
object.

2. The digital camera according to claim 1, wherein the  
second processor processes the added signal obtained  
by adding signals of a less number of pixels than that  
of the pixels from which the outputs are got to be  
processed by the first processor.

3. The digital camera according to claim 1, wherein  
electric charge is accumulated on the pixels of the  
image sensor to generate the outputs to be got, and  
wherein the second processor includes a timer for  
determining a time period from a start of the  
accumulation of charge to a time when the added signal  
reaches a predetermined level, the light metering  
being in accordance with the time period.

## 4. A digital camera comprising:

an image sensor having a plurality of two-  
dimensionally arranged pixels on which electric  
charge is accumulated to generate signals,  
respectively, capable of selectively reading out

the signals from desired pixels; and  
a processor for light metering including a timer for  
determining a time period from a start of the  
accumulation of charge to a time when a signal from  
5 the image sensor reaches a predetermined level, the  
light metering being on the basis of the time  
period.

5. The digital camera according to claim 4, wherein the  
10 image sensor is further capable of adding signals  
of at least two pixels prior to getting the outputs  
from the image sensor, and wherein the timer  
determines a time period from a start of the  
accumulation of charge to a time when the added  
15 signal reaches a predetermined level.

6. The digital camera according to claim 5, wherein the  
processor for light metering further comprises an  
output reader for repeating to get the outputs from  
20 the pixels in accordance with a predetermined  
timetable, and a comparator for comparing the  
signal with the predetermined level, and wherein  
the timer determines a time period from a start of  
the accumulation of charge to a time when the  
25 comparator informs that the added signal reaches  
the predetermined level.

7. The digital camera according to claim 6, wherein the  
predetermined level corresponds to the optimum  
30 exposure level of the camera.

8. The digital camera according to claim 6, wherein the  
output reader repeats to get the outputs from the  
pixels with the charge accumulation continued  
35 without being reset during the period in which the

005250" 49205950

timer is determining the time.

9. The digital camera according to claim 6, wherein an interval between the repetition of getting the output  
5 by the output reader is changeable among pixels.
10. The digital camera according to claim 9, wherein the output reader gives priority to a pixel of the shorter interval in getting the output.
- 10 11. The digital camera according to claim 9, wherein the signals from pixels of the same interval are added prior to getting the outputs from the pixels.
- 15 12. The digital camera according to claim 6, wherein an interval between the repetition of getting the output by the output reader is variable for changing a range of light metering.
- 20 13. The digital camera according to claim 6, further comprising an aperture through which the image sensor receives light, wherein the aperture is variable for changing a range of light metering.
- 25 14. The digital camera according to claim 4, further comprising a focus detector for processing the signal of the image sensor to detect the focusing condition of the camera.
- 30 15. The digital camera according to claim 14, wherein the focus detector processes the outputs from the individuals of the pixels of the image sensor to form a digital image to be investigated in the focus detection.



16. The digital camera according to claim 14, wherein a range covering the pixels participating in the focus detection differs from that in the light metering.

5

17. The digital camera according to claim 14, wherein the image sensor is reset after the time period relating to the light metering to accumulate charge for the same period as the time period to get signals for the focus detection.

10

18. The digital camera according to claim 17, wherein the image sensor is reset after the focus detection to accumulate charge for the time period calculated from light metering calculation to get signals for forming a picture image of an object of the camera.

15

19. The digital camera according to claim 14, wherein the image sensor is further capable of adding signals of at least two pixels prior to getting the outputs from the image sensor, and wherein the focus detector processing the added signals when the light metering informs an insufficient brightness of an object in terms of the focus detection.

20

25

20. The digital camera according to claim 19, wherein the addition means the simple addition of signals from more than two pixels adjacent with each other.

21. The digital camera according to claim 19, wherein the addition means the moving addition of signals from more than two pixels adjacent with each in which the pixel is shifted by one on every addition.

30

22. The digital camera according to claim 14, further

35

006280 49203960

comprising a white balance calculator for processing the signal obtainable from the image sensor without resetting the image sensor after the focus detection.

- 5 23. The digital camera according to claim 22, wherein the image sensor is further capable of adding signals of at least two pixels prior to getting the outputs from the image sensor, and wherein the white balance calculator processes the added signal.

10

24. The digital camera according to claim 14, further comprising picture image processor for processing the signals from the image sensor to form a picture image of an object of the camera and a white balance calculator for processing the signal obtainable from the image sensor without resetting the charge accumulated on the image sensor for the picture image.

15

- 20 25. The digital camera according to claim 14, further comprising a memory for storing the signals from the image sensor to form a picture image of an object of the camera and a white balance calculator for processing the signals stored in the memory.

25

26. A digital camera according to claim 4, wherein after accumulation of charge for light metering, the calculation for white balance is performed, and the output of the pixels is got from the image sensor for focus detection.

30

27. The digital camera according to claim 14, wherein the focus detector includes an optical system for forming an image of an object on the image sensor, a pair of apertures for dividing light flux of the

35

006280"49205960

optical system and filters each arranged across the divided light fluxes passing through the pair of apertures, respectively.

- 5 28. The digital camera according to claim 27, wherein the image sensor is of a color image sensor having red, green and blue pixels and wherein the filters arranged across the divided light fluxes are of green and magenta filters, respectively.

10

29. The digital camera according to claim 22, wherein the image sensor receives light through the pair of apertures on light metering.

- 15 30. The digital camera according to claim 29, further comprising another aperture through which the image sensor receives light, wherein the pair of apertures are replaced by the another aperture for changing a range of light metering.

20

31. A focusing detector comprising:  
a color image sensor having red, green and blue pixels;  
an optical system for forming an image of an object  
25 on the color image sensor;  
a pair of apertures for dividing light flux of the optical system; and  
green and magenta filters each arranged across the divided light fluxes passing through the pair of  
30 apertures, respectively.

32. The focusing detector according to claim 31, wherein the pair of apertures are movable perpendicularly to the optical axis of the optical system.

35

006280-4920960

33. The focusing detector according to claim 31, wherein the pair of apertures are arranged symmetrically with the optical axis of the optical system.

5 34. The focusing detector according to claim 31, further comprising a shield arranged across the light flux of the optical axis, wherein the pair of apertures is defined by the shield.

10 35. The focusing detector according to claim 31, wherein both the light flux passing through the apertures are sensed simultaneously by the image sensor.

006220"49205960  
15 36. The focusing detector according to claim 31, further comprising another pair of apertures for dividing light flux of the optical system and green and magenta filters each arranged across the divided light fluxes passing through the second mentioned pair of apertures, respectively, the direction of  
20 alignment of the first mentioned pair of apertures being different from that of the second mentioned pair of apertures.

25 37. The focusing detector according to claim 31, further comprising an image processor for forming a first image on the basis of the green pixels of the color image sensor and a second image on the basis of the red and blue pixels of the color image sensor, and a calculator for calculating the degree and  
30 direction of defocus of the optical system with respect to the object on the basis of the cross correlation between the first and second images.

35 38. The focusing detector according to claim 37, wherein the calculator is responsive to information

relating to the arrangement of the red, green and blue pixels in the image sensor to compensate the result of the calculation.

5 39. A digital camera comprising:

an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels and capable of adding signals of at least two-dimensionally arranged three pixels prior to  
10 getting the outputs from the image sensor;

a processor for processing outputs got from the individuals of the pixels of the image sensor to form a picture image of an object of the camera;  
15 and

a white balance calculator for processing the added signals of the image sensor.

20 40. The digital camera according to claim 39, wherein the image sensor has a plurality of kinds of color pixels, and wherein the white balance calculator processes the added signals in which the signals of the same kind of pixels are added, respectively.

25 41. The digital camera according to claim 40, the added signals are formed by adding signals of all the same kind of pixels, respectively.

42. A digital camera comprising:

30 an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels;

a processor for processing outputs got from the  
35 pixels of the image sensor to form a picture image

006280-49205960

of an object of the camera; and  
a white balance calculator which functions after the  
process of the processor.

5 43. The digital camera according to claim 42, wherein  
the processor includes a memory for storing the  
signals from the image sensor to keep the picture  
image, wherein the white balance calculator  
processes the signals stored in the memory.

10

44. The digital camera according to claim 42, wherein  
the white balance calculator processes signals read  
out from the pixels of the image sensor without  
resetting the signals of the image sensor which have  
15 been read out for the process of the processor.

45. A digital camera comprising:

an image sensor having a plurality of two-  
dimensionally arranged pixels capable of  
20 selectively reading out signals from desired pixels  
for the purpose of at least two of the processes  
for light metering, focus detection, white balance  
calculation and picture image forming; and

an output reader for getting the outputs from the  
25 pixels for the purpose of at least two processes  
with the signals of the pixels kept without being  
reset between the first and second processes.

46. A digital camera comprising:

30 an image sensor having a plurality of two-  
dimensionally arranged pixels capable of  
selectively reading out signals from desired pixels  
for the purpose of at least two of the processes  
for light metering, focus detection, white balance  
calculation and picture image forming; the image  
35

0062280-49205960

sensor having a plurality of amplifiers of variable gain for amplifying the signals of the pixels, respectively; and

5 a gain controller for changing the gain between at least the two processes.

47. A digital camera comprising:

10 an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels for the purpose of at least two of the processes for light metering, focus detection, white balance calculation and picture image forming;

15 an amplifier of variable gain for amplifying the output of the image sensor;

a gain controller for changing the gain between at least the two processes.

48. A digital camera comprising:

20 an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels for the purpose of at least two of the processes for light metering, focus detection, white balance calculation and picture image forming, and wherein  
25 one process is started in response to completion of outputting the signals for another process.

006220 49205960

ABSTRACT OF THE DISCLOSURE

A digital camera having small time lag for recording the object after releasing a shutter by employing less movable parts, and by employing an image sensor for other purpose as well as actual forming picture image for recording the object is provided. According to one aspect of the present invention, a digital camera includes an image sensor having a plurality of two-dimensionally arranged pixels capable of selectively reading out signals from desired pixels and capable of adding signals of at least two pixels prior to getting the output from the image sensor, a first processor for processing outputs got from the individuals of the pixels of the image sensor to form a picture image of an object of the camera and a second processor for processing the added signal of the image sensor for light metering of the object. In the digital camera according to the present invention, by using an image sensor capable of selectively reading out signals from desired pixels and capable of adding signals prior to getting the output from the image sensor, signals from respective pixels are read out while processing picture image forming, and the output is got from the image sensor after signals from respective pixels within light-metering area are added while processing light metering. Accordingly, calculation for light metering can be processed quickly and a circuit for processing signals output from the image sensor can be simple. As a result, power savings as well as cost savings can be realized.

30

00650764-002900



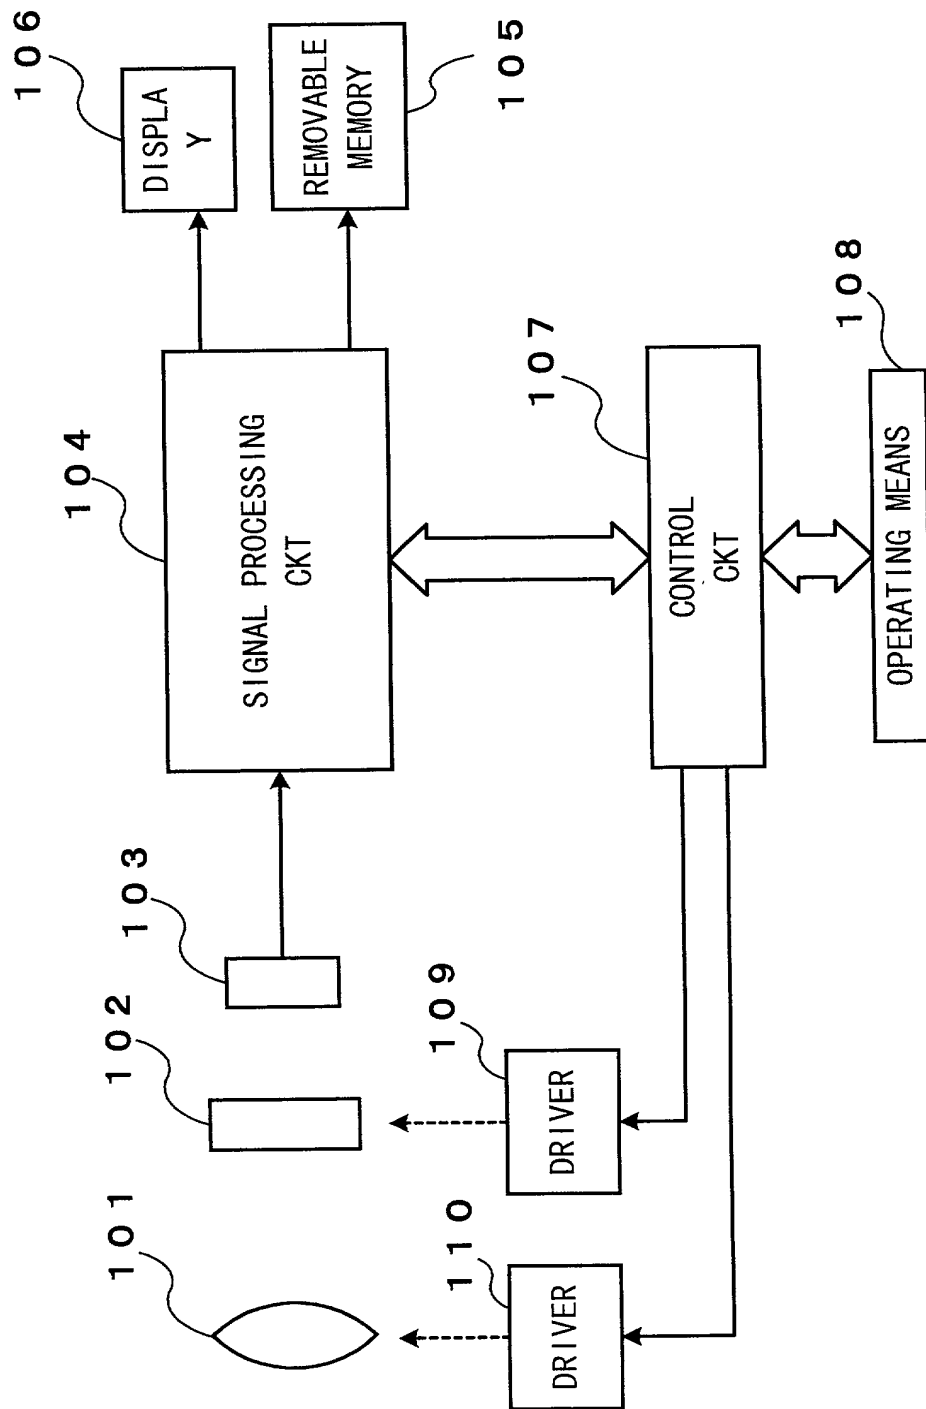


Fig. 1

2/18


**BGBGBGBG  
GRGRGRGR  
BGBGBGBG  
GRGRGRGR  
BGBGBGBG  
GRGRGRGR**

Fig. 2a

**GRGRGRGR  
GBGBGBGB  
GRGRGRGR  
GBGBGBGB  
GRGRGRGR  
GBGBGBGB**

Fig. 2b

005252"49205560



100-443887-100

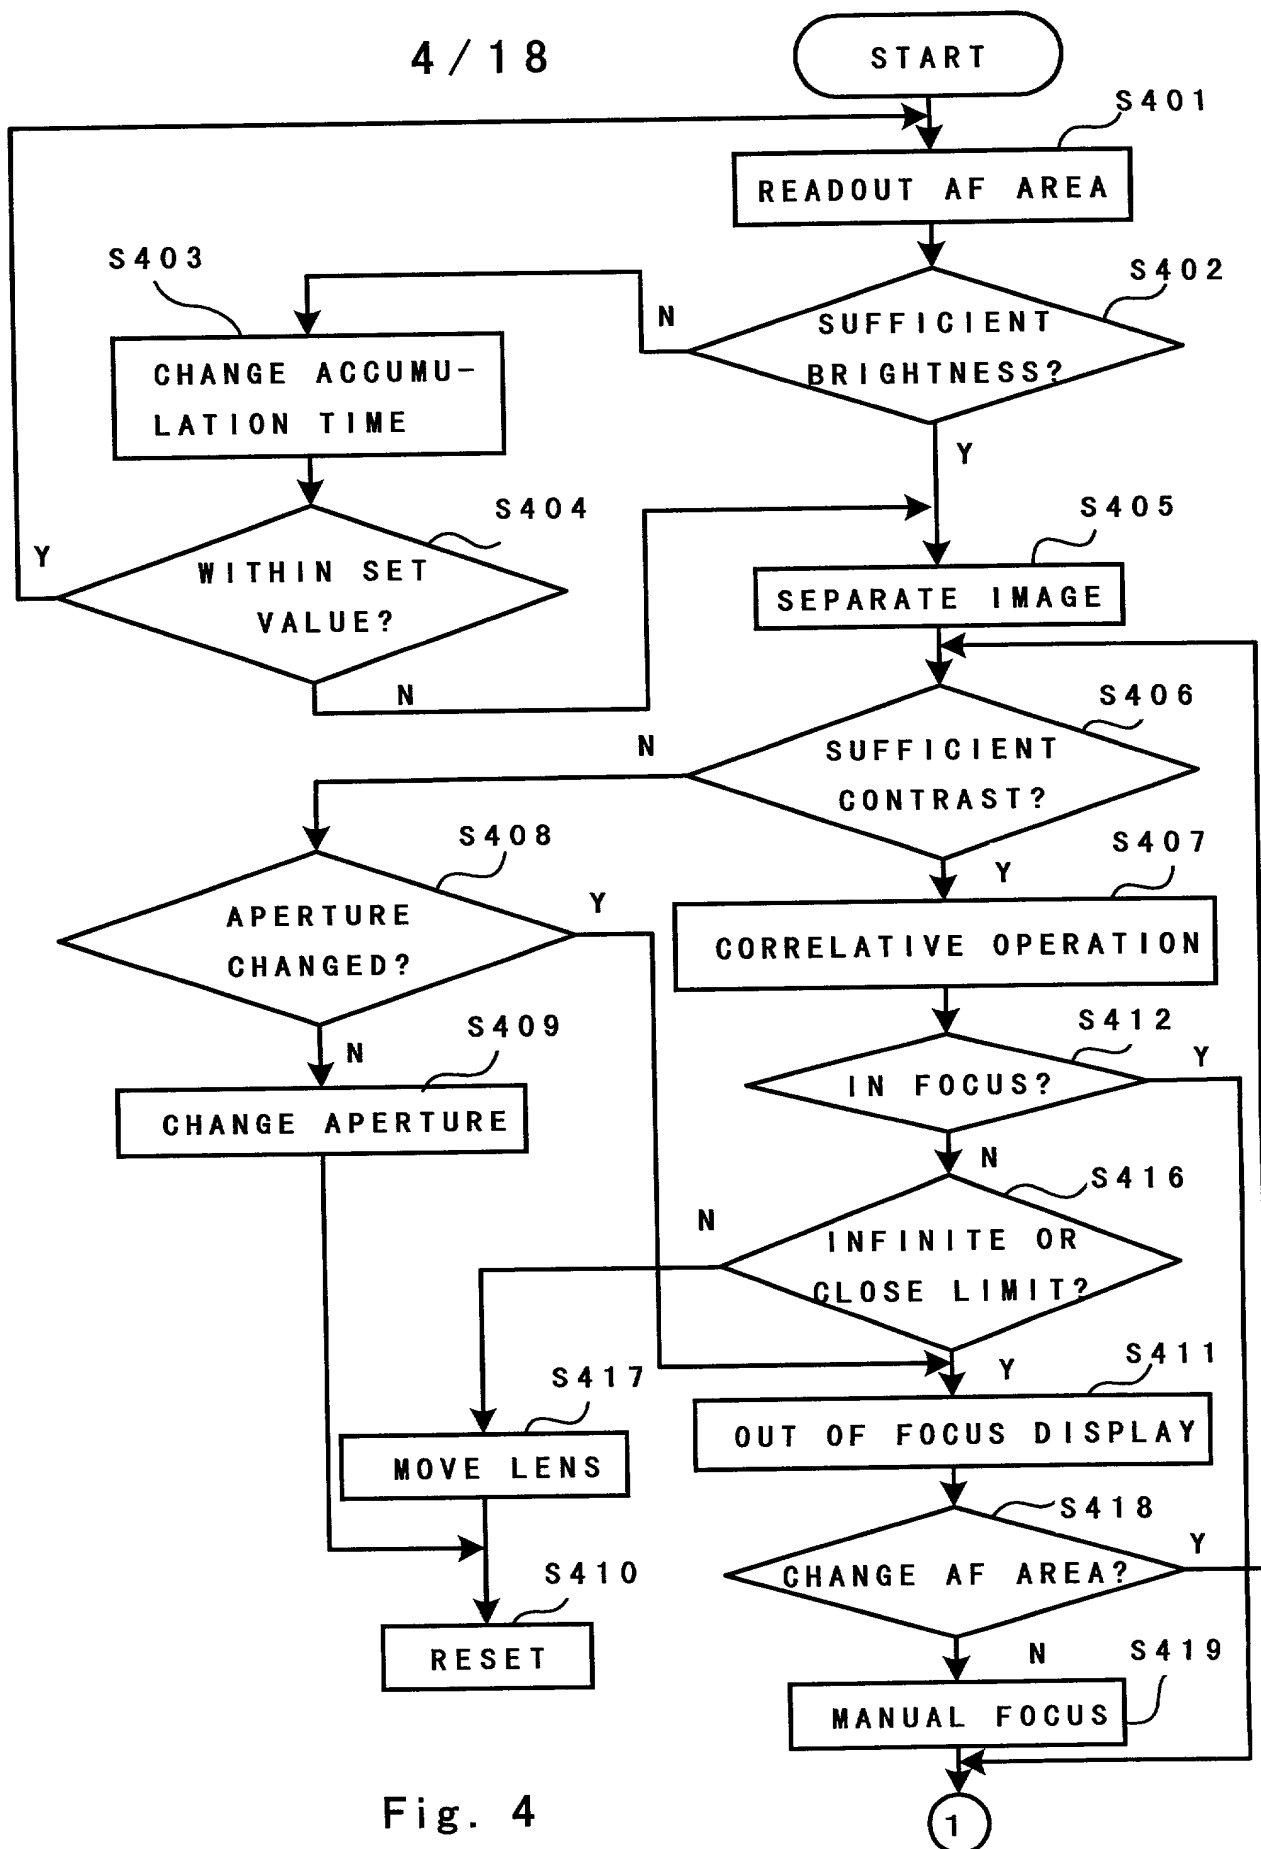


Fig. 4

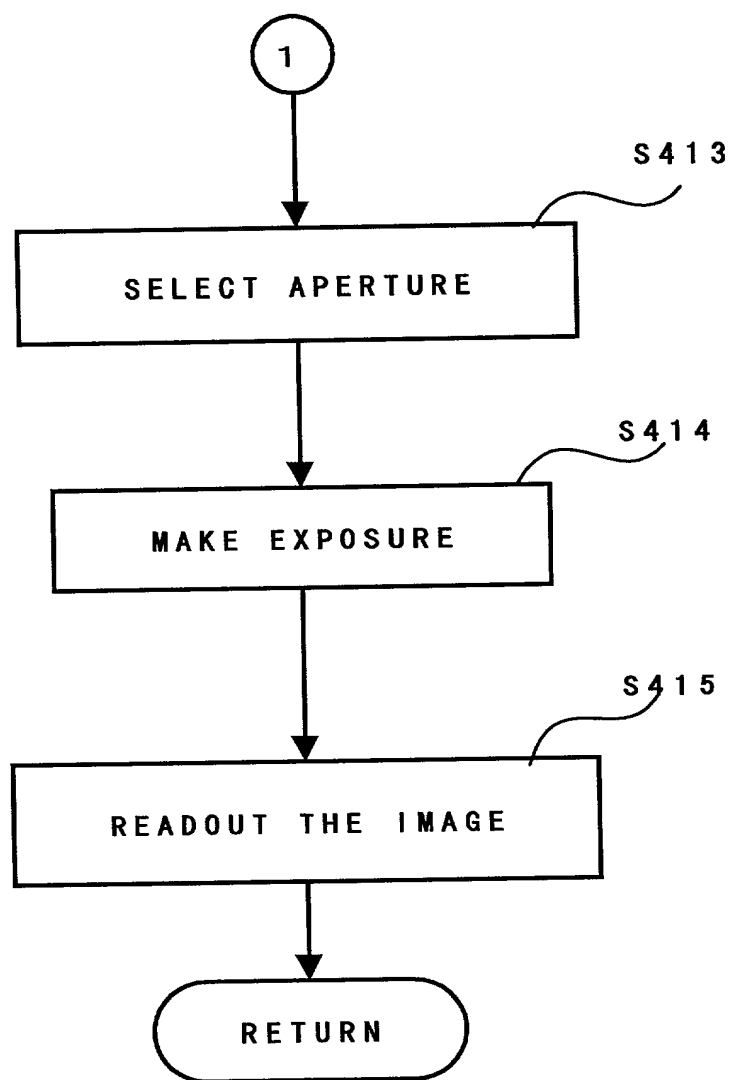


Fig. 5

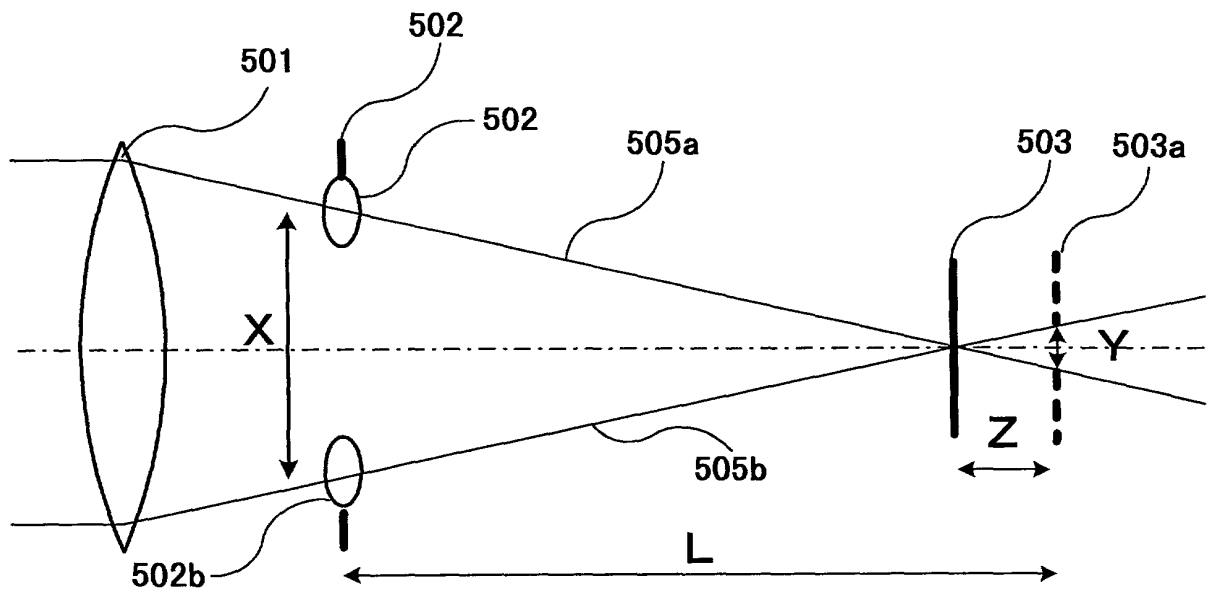


Fig. 6

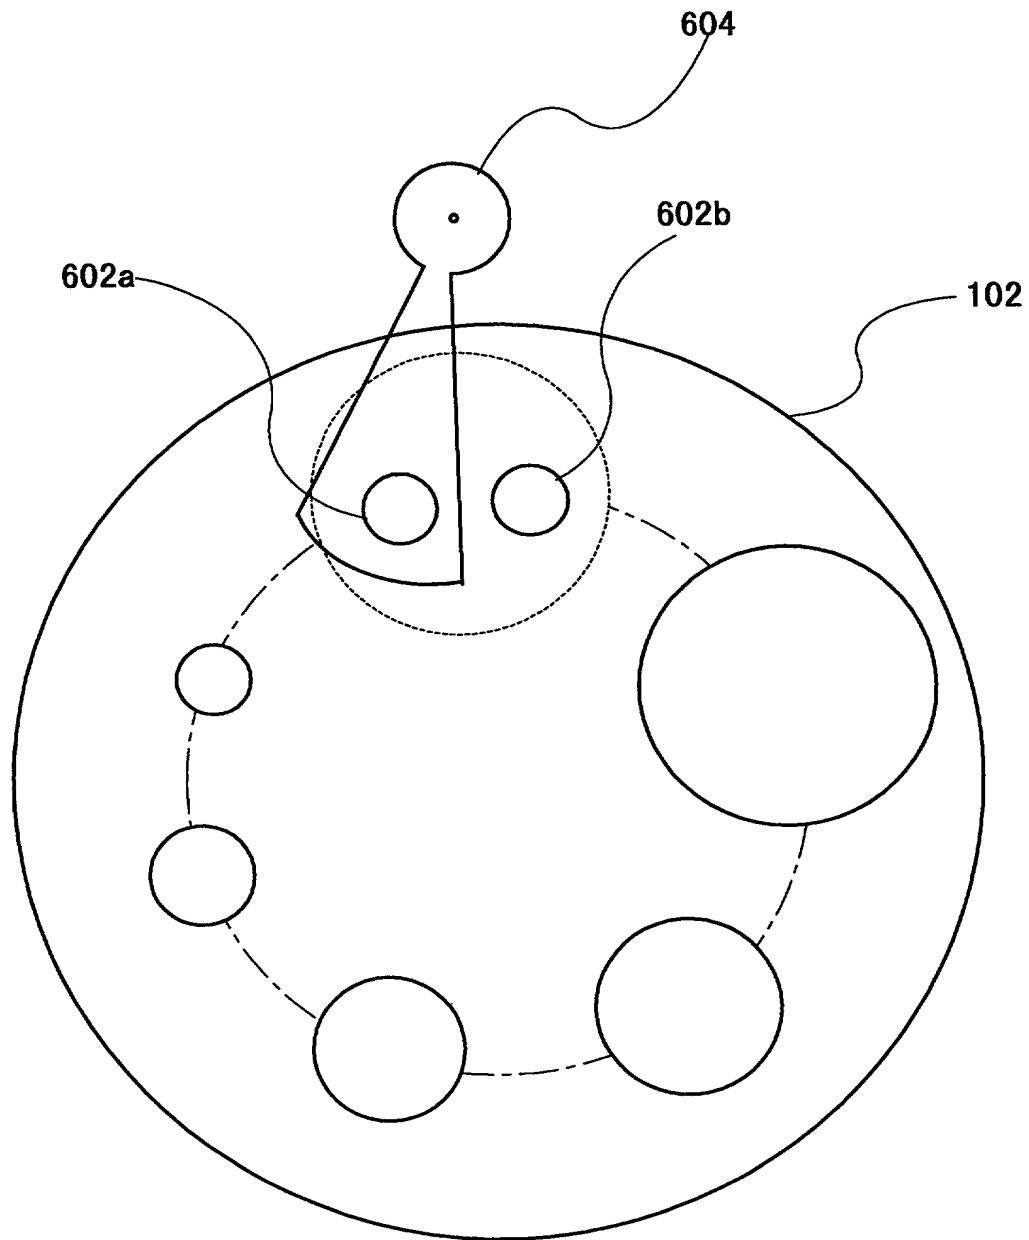


Fig. 7

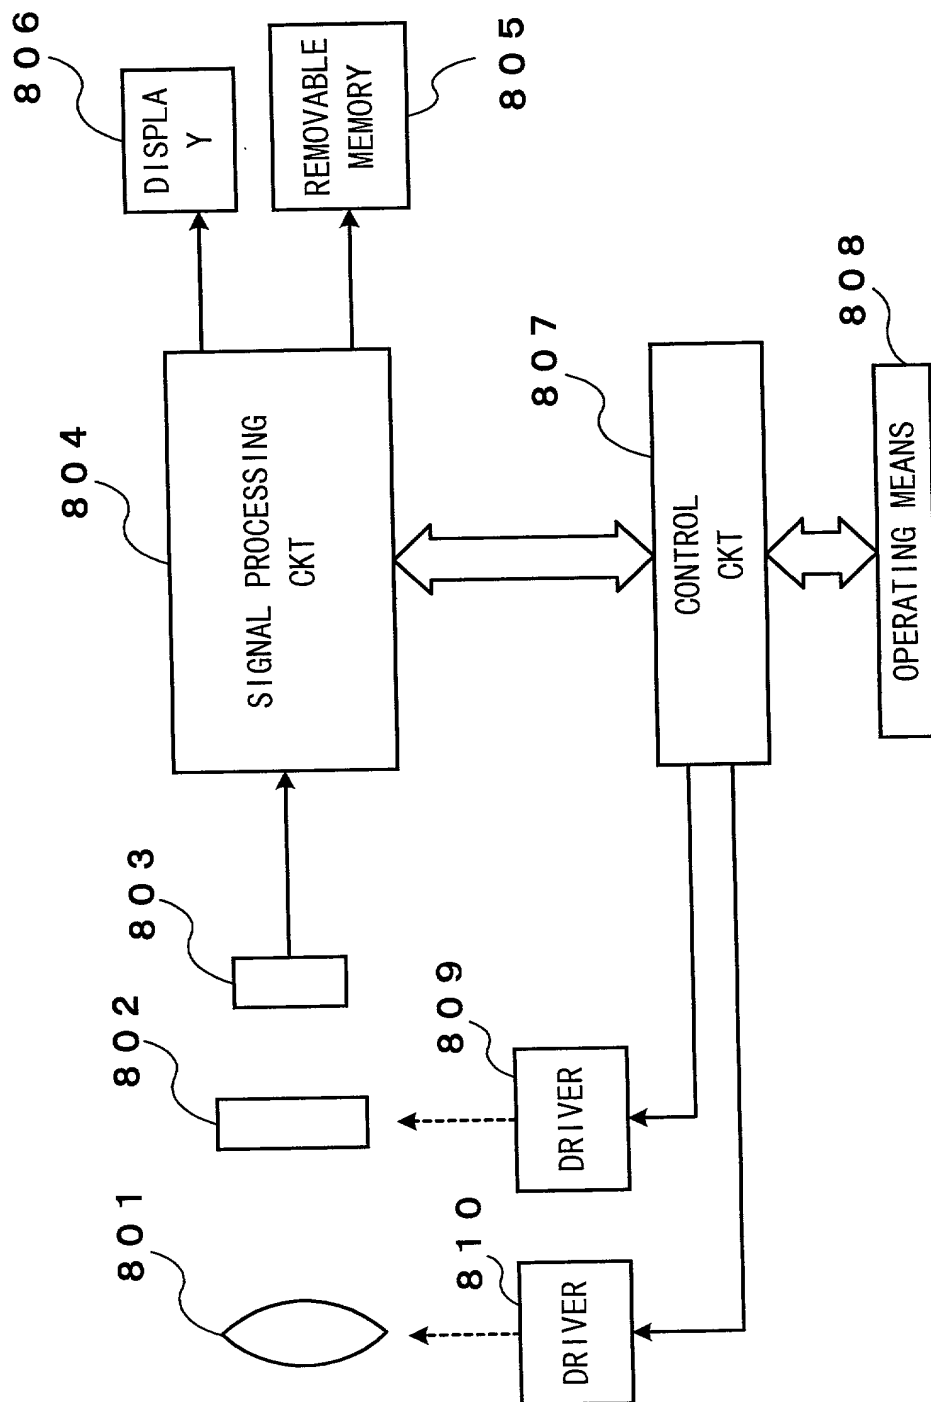


Fig. 8



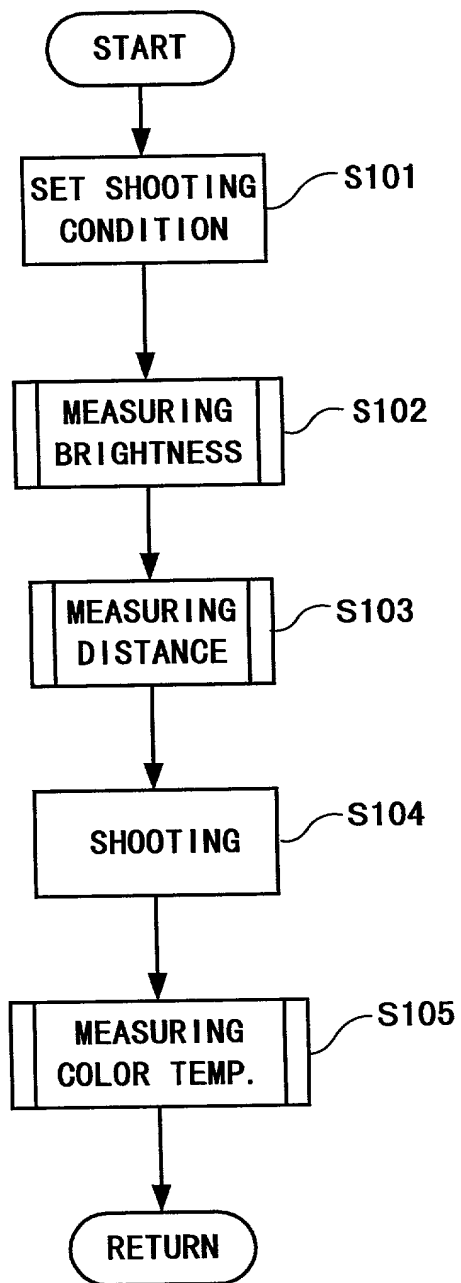


Fig. 9

10/18

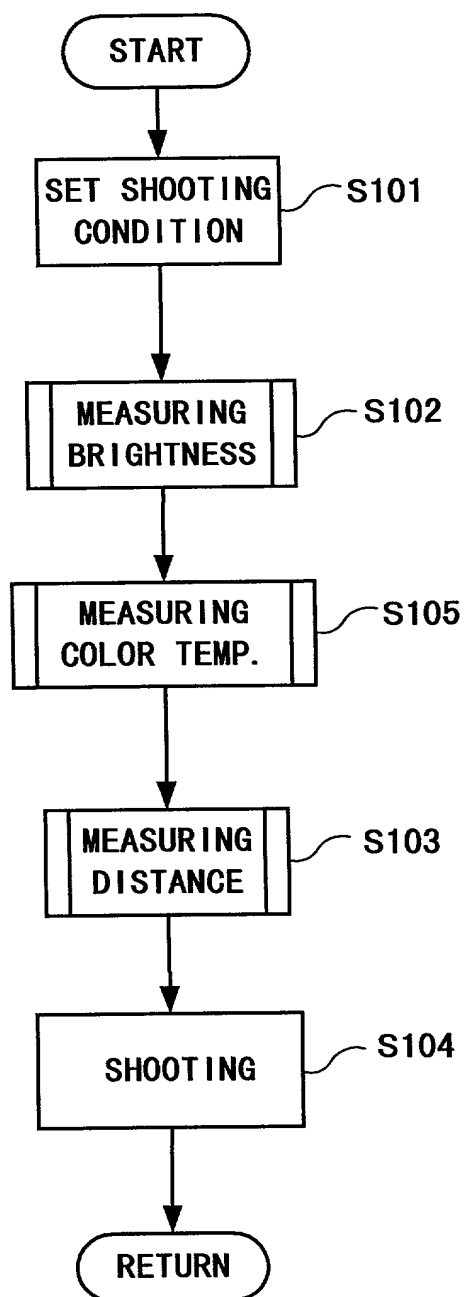


Fig. 10

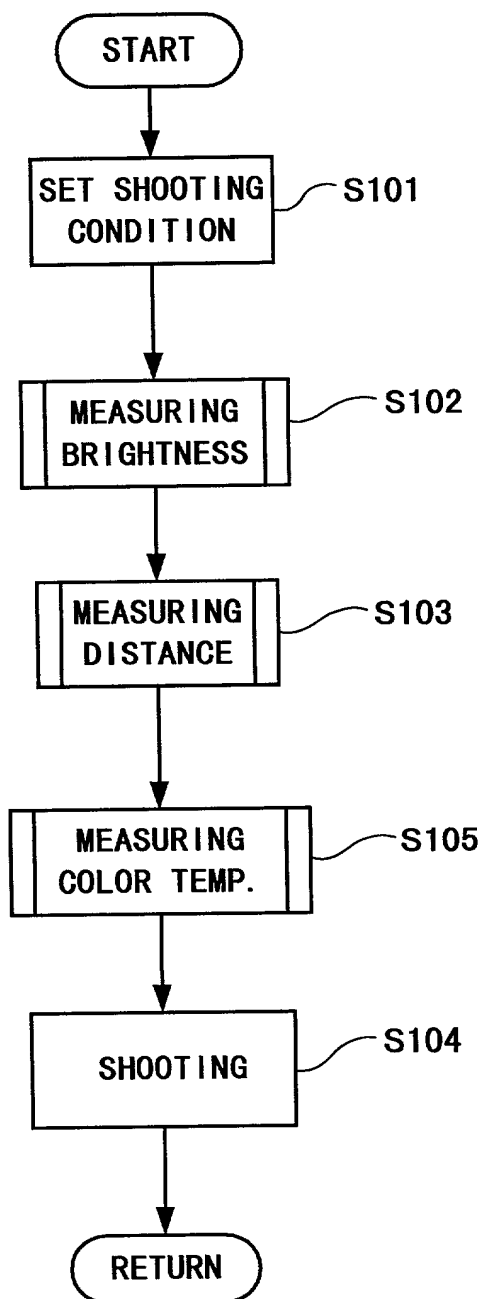


Fig. 11

12/18

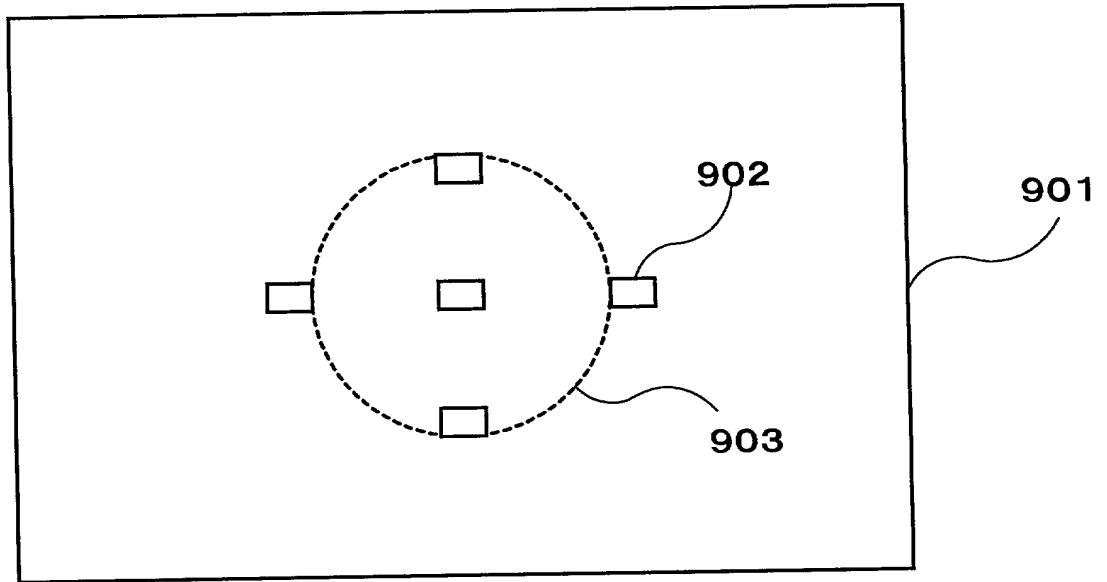


Fig. 12

13/18

1	2	3	4	1
2	3	4	1	2
3	4	1	2	3
4	1	2	3	4
1	2	3	4	1

Fig. 13

1	2	3	4	1	2	3	4
4	1	2	3	4	1	2	3
3	4	1	2	3	4	1	2
2	3	4	1	2	3	4	1

Fig. 14

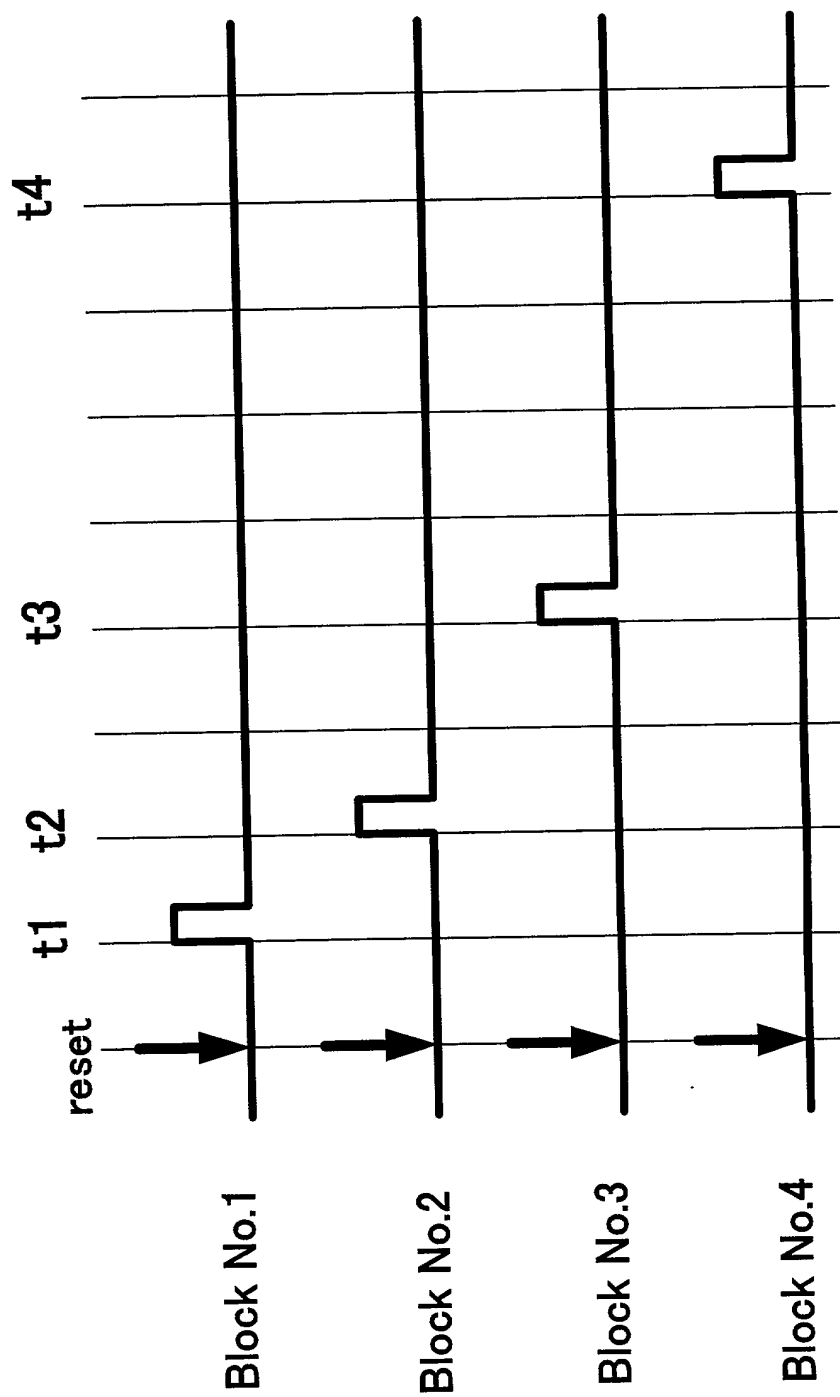


Fig. 15

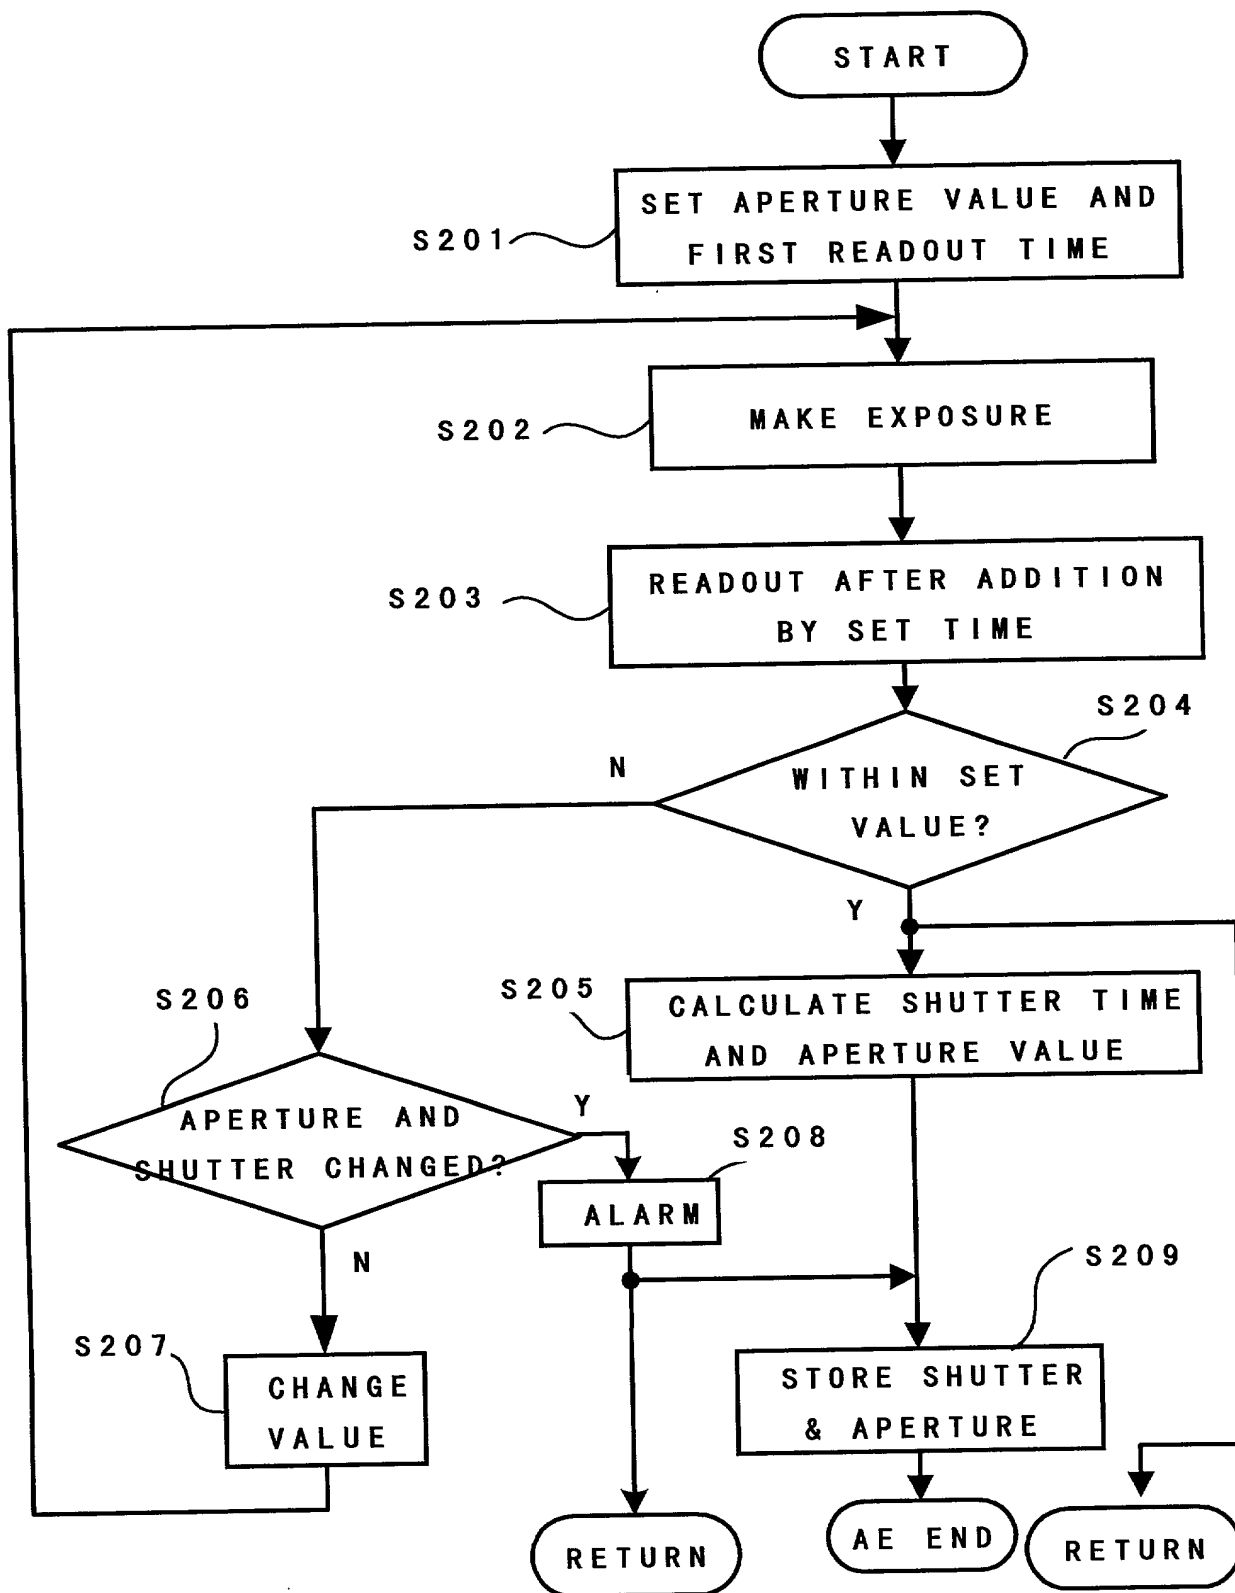


Fig. 16

16/18

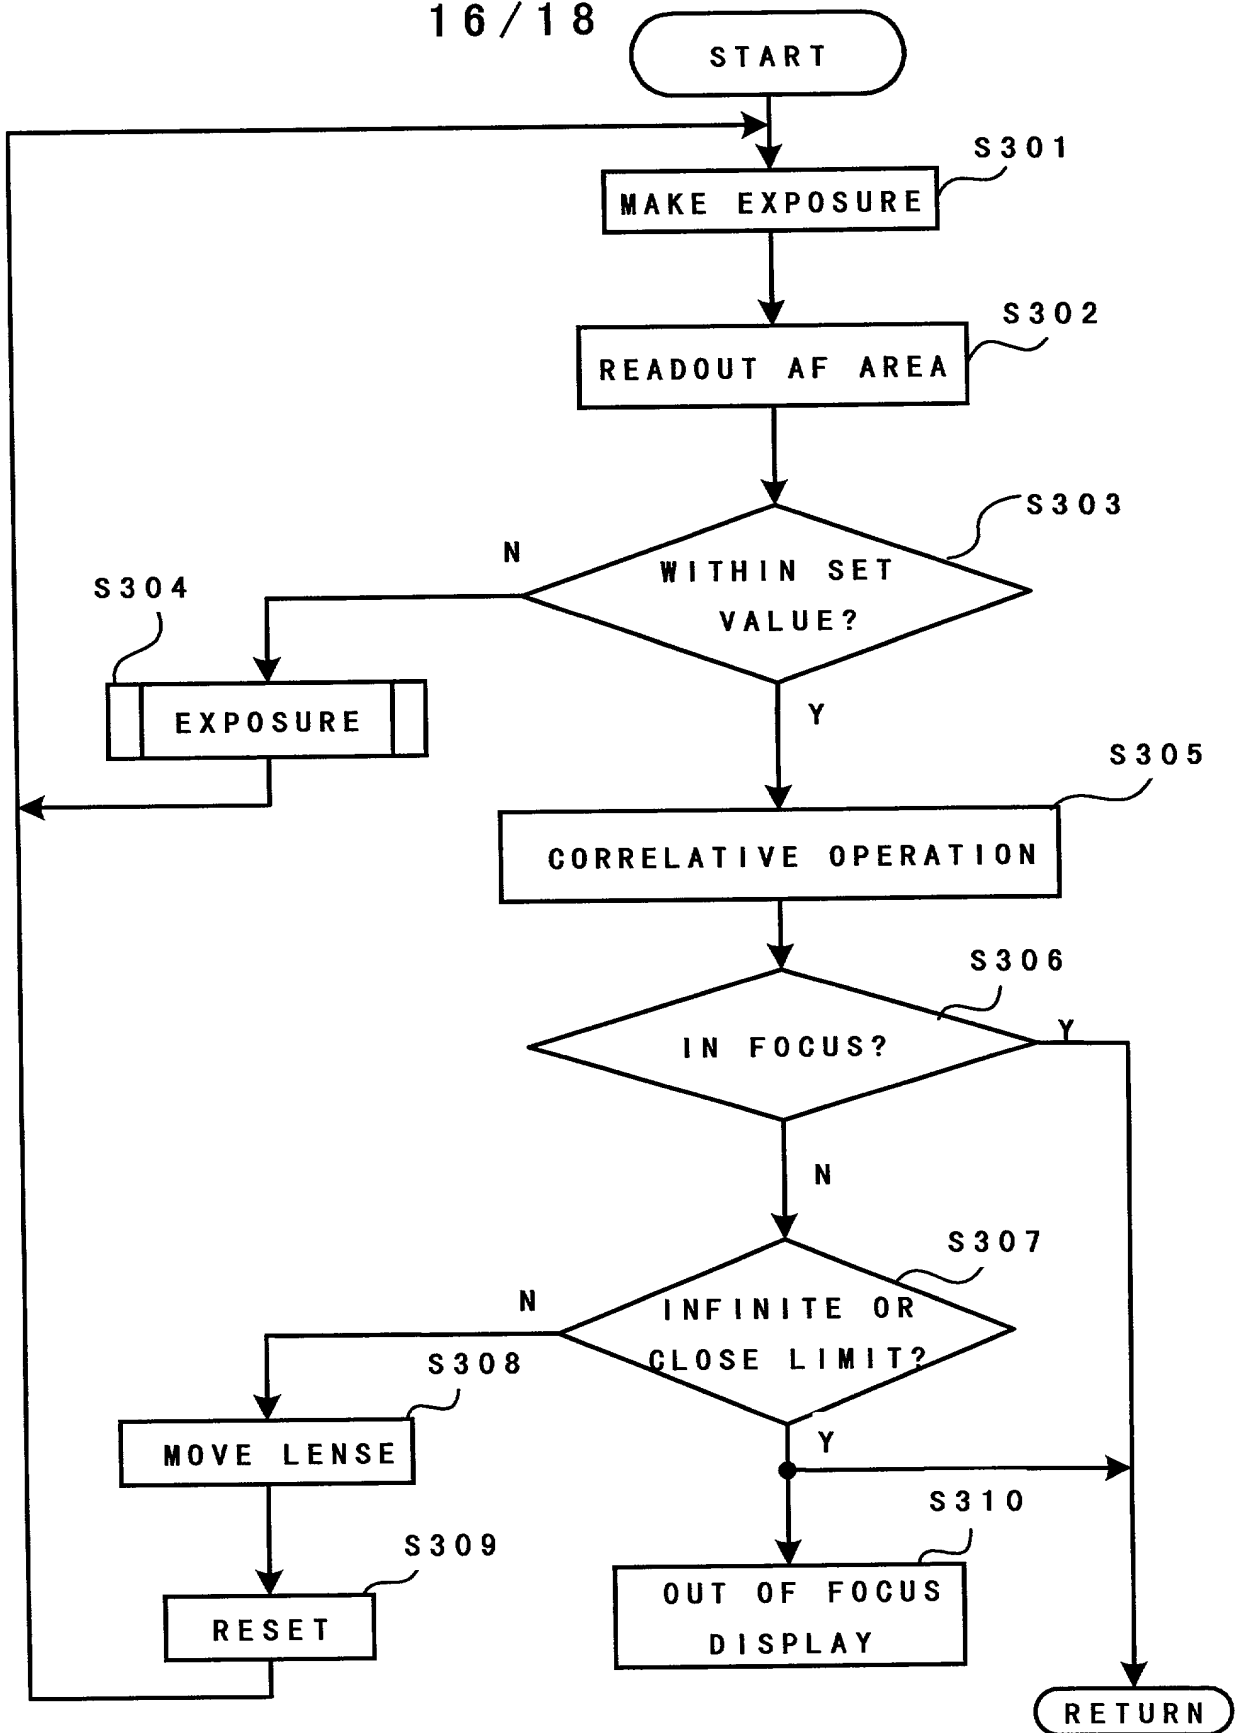


Fig. 17

006280" 43405960



17/18

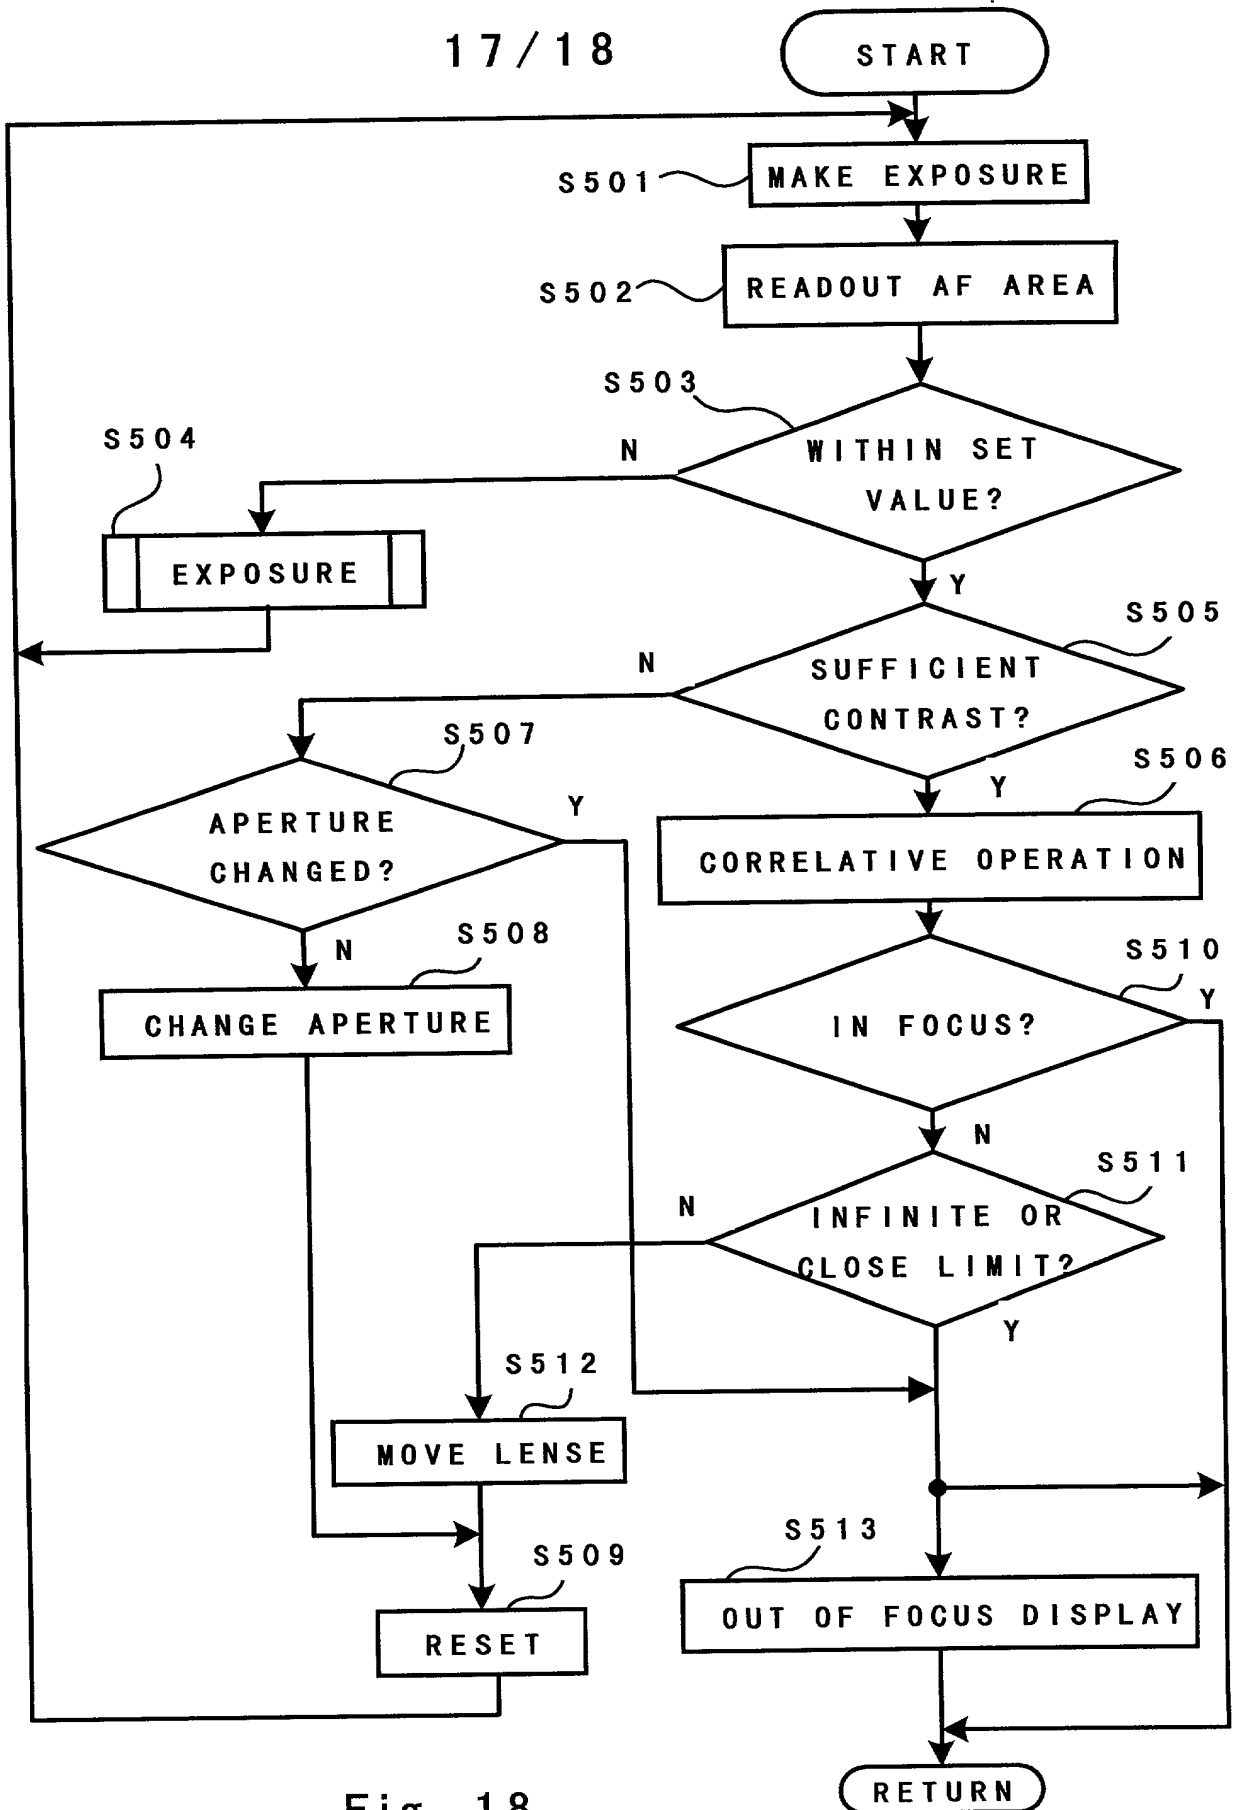


Fig. 18

0065280-49205960

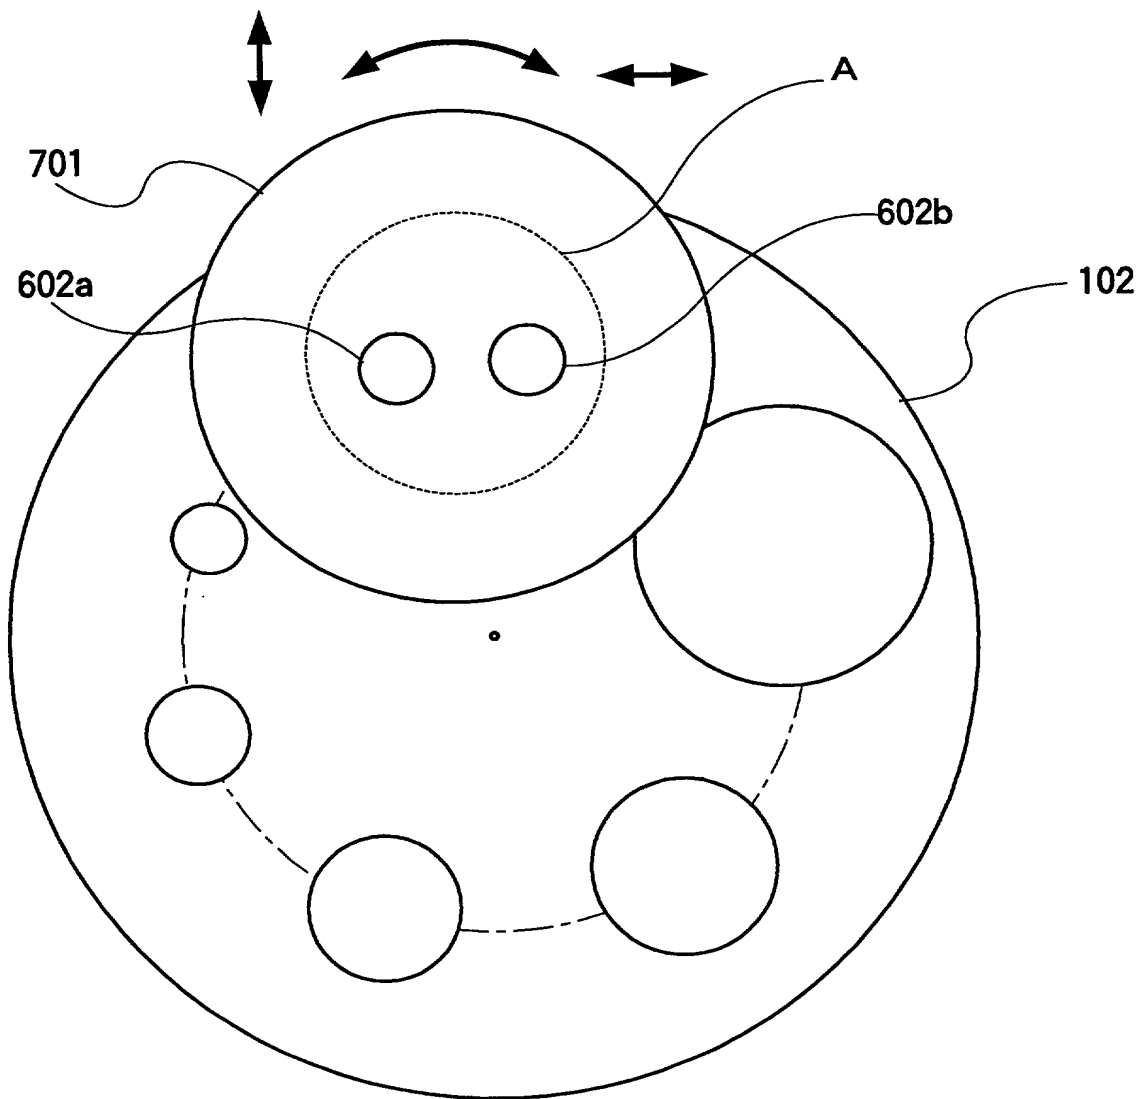


Fig. 19

# Declaration and Power of Attorney for Patent Application

## 特許出願宣言書兼委任状

### Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便宛先および国籍は、下欄に氏名に続いて記載したとおりであり、下記名称の発明に関し、特許請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

### DIGITAL CAMERA

その明細書を

(該当するものにチェック)

☐ここに添付する。

☐ \_\_\_\_\_年\_\_\_\_月\_\_\_\_日に

出願番号第\_\_\_\_\_として提出され、

\_\_\_\_\_年\_\_\_\_月\_\_\_\_日に補正し、

(該当する場合)

私は、前記のとおり補正した特許請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦施行規則第 37 章第 1 条第 56 項に従い、本願の特許性の有無について重要な情報を開示すべき義務を有することを認める。

私は、米国法第 35 章第 119 条に基づく下記の外国特許出願もしくは発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の提出日前の提出日を有する外国特許出願もしくは発明者証出願および/もしくは米国仮出願を以下に明記する：

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and/or any U.S. provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

0065280"19205960

Prior foreign and/or provisional applications  
先行外国出願/仮出願

Priority claimed  
優先権の主張

11-249915  
(Number/番号)

JAPAN  
(Country/国名)

September 9, 1999  
(Day/Month/Year Filed/提出年月日)

☒  
(Yes/はい)

☐  
(No/いいえ)

2000-46705  
(Number/番号)

JAPAN  
(Country/国名)

February 18, 2000  
(Day/Month/Year Filed/提出年月日)

☒  
(Yes/はい)

☐  
(No/いいえ)

(Number/番号)

(Country/国名)

(Day/Month/Year Filed/提出年月日)

☐  
(Yes/はい)

☐  
(No/いいえ)

(Number/番号)

(Country/国名)

(Day/Month/Year Filed/提出年月日)

☐  
(Yes/はい)

☐  
(No/いいえ)

私は、米国法第 35 章第 120 条に基づく下記の米国特許出願の利益を主張し、本願の特許請求の範囲各項に記載の主題が米国法第 35 章第 112 条の第 1 段落に規定の態様で先の米国出願に開示されていない限度において、先の出願の提出日と本願の国内提出日もしくは P C T 国際出願提出日の間に公表された連邦施行規則第 37 章第 1 条第 56 項に記載の重要な情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States code, §120 of any United States application(s) listed below and, in so far as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No./出願番号)

(Filing Date/提出日)

(Status: Patented, Pending, abandoned/  
現状: 特許成立、係属中、放棄済み)

(Application Serial No./出願番号)

(Filing Date/提出日)

(Status: Patented, Pending, abandoned/  
現状: 特許成立、係属中、放棄済み)

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、米国法第 18 章第 1001 条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true: and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

00650764 082900

委任状：私は下記発明者として、以下の代理人をここに選任し、本願の手続を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。（代理人氏名および登録番号を明記のこと）

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;  
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;  
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771;  
Mario A. Costantino, Reg. No. 33,565; Caroline D. Dennison, Reg. No. 34,494; and  
Stephen J. Roe, Reg. No. 34,463

Send Correspondence To/書類送付先:

OLIFF & BERRIDGE  
P. O. BOX 19928  
ALEXANDRIA, VIRGINIA 22320  
USA  
Telephone: (703) 836-6400

Direct Telephone Calls To (name and telephone number)/直通電話連絡先(名称および電話番号):

Full name of sole or first inventor/単独または第一発明者の氏名	
Tadashi, OHTA	
Inventor's signature/同発明者の署名	Date/日付 Tadashi Ohta August 28, 2000
Residence/住所 Yokohama-shi, Kanagawa, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o Nikon Technologies Inc. 3-25, Futaba 1-chome, Shinagawa-ku, Tokyo 142-0043, Japan	
Full name of second joint inventor (if any)/第二共同発明者の氏名(該当する場合)	
Second inventor's signature/第二発明者の署名	Date/日付
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便宛先	

Supply similar information and signature for third and subsequent joint inventors  
第三又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。

006280"4920360